


NOVEMBER 20, 2023

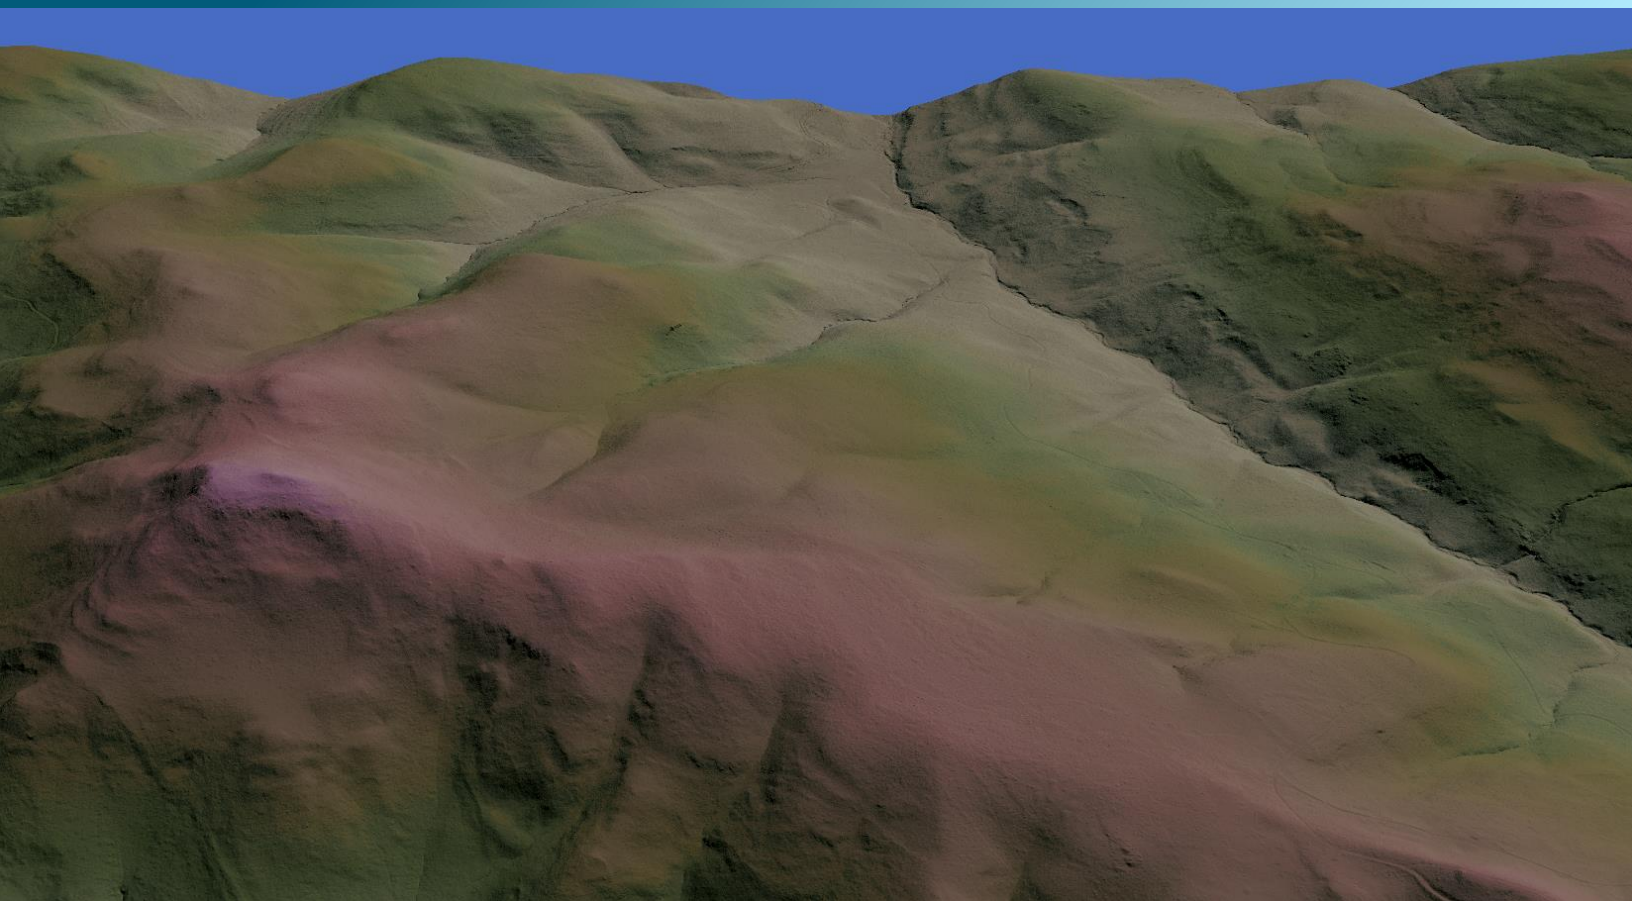

OLC Jackson County, Oregon

2022 Lidar Technical Data Report

Prepared For:



Department of Geology and Mineral Industries
Robert Hairston Porter
800 NE Oregon St, Suite 965
Portland, OR 97232
971-263-4377

Prepared By:



NV5 Geospatial Corvallis
1100 NE Circle Blvd, Ste. 126
Corvallis, OR 97330
PH: 541-752-1204

TABLE OF CONTENTS

INTRODUCTION	6
Deliverable Products	7
ACQUISITION	9
Planning.....	9
Airborne Survey.....	10
Lidar	10
Ground Survey.....	13
Base Stations.....	13
Ground Survey Points (GSPs).....	14
Land Cover Class	16
PROCESSING	18
NIR Lidar Data.....	18
Feature Extraction	21
Intensity Image Processing	21
Swath Separation Raster Processing	21
RESULTS & DISCUSSION.....	22
Lidar Density.....	22
Lidar Accuracy Assessments.....	25
Lidar Non-Vegetated Vertical Accuracy.....	25
Lidar Vegetated Vertical Accuracies	28
Lidar Relative Vertical Accuracy	30
Lidar Horizontal Accuracy	31
CERTIFICATIONS	32
SELECTED IMAGES.....	33
GLOSSARY	34
APPENDIX A - ACCURACY CONTROLS	35

Cover Photo: A view looking north in the Cascade Mountain Range east of Medford, Oregon. The image was created from the lidar bare earth model colored by elevation.

LIST OF FIGURES

Figure 1: Location map of the OLC Jackson County site in Oregon	8
Figure 2: Flightlines map	12
Figure 3: Ground survey location map.....	17
Figure 4: The color ramp values used in the OLC Jackson County project	21
Figure 5: Frequency distribution of first return point density values per 100 x 100 m cell	23
Figure 6: Frequency distribution of ground-classified return point density values per 100 x 100 m cell ..	23
Figure 7: First return and ground-classified point density map for the OLC Jackson County site (100 m x 100 m cells)	24
Figure 8: Frequency histogram for lidar classified LAS deviation from ground check point values (NVA). 26	
Figure 9: Frequency histogram for the lidar bare earth DEM surface deviation from ground check point values (NVA).....	27
Figure 10: Frequency histogram for the lidar surface deviation from ground control point values	27
Figure 11: Frequency histogram for the lidar surface deviation from all land cover class point values (VVA)	29
Figure 12: Frequency histogram for the lidar bare earth DEM deviation from vegetated check point values (VVA)	29
Figure 13: Frequency plot for relative vertical accuracy between flight lines.....	30
Figure 14: A view looking south in the Cascade Mountain Range just west of Ashland, Oregon. The image was created from the lidar bare earth model and above ground point cloud, colored by satellite imagery.	33

LIST OF TABLES

Table 1: Acquisition dates, acreage, and data types collected on the OLC Jackson County site.....	6
Table 2: Deliverable product projection information	7
Table 3: Products delivered to DOGAMI for the OLC Jackson County site	7
Table 4: Flight Date Table	10
Table 5: Lidar specifications and aerial survey settings	11
Table 6: Base station positions for the OLC Jackson County acquisition. Coordinates are on the NAD83 (2011) datum, epoch 2010.00.....	13
Table 7: Federal Geographic Data Committee monument rating for network accuracy	14
Table 8: NV5 Geospatial ground survey equipment identification.....	15
Table 9: Land Cover Types and Descriptions	16
Table 10: Software used for statistical analysis	19
Table 11: ASPRS LAS classification standards applied to the OLC Jackson County dataset.....	19
Table 12: Lidar processing workflow	20
Table 13: Average lidar point densities.....	23
Table 14: Absolute accuracy results	26
Table 15: Vegetated vertical accuracy results	28
Table 16: Relative accuracy results.....	30
Table 17: Horizontal Accuracy	31

INTRODUCTION

This photo taken by NV5 Geospatial acquisition staff shows a view looking east at the ROGUE_01_RESET base station collected for the OLC Jackson County ground survey.



In November 2022, NV5 Geospatial (NV5) was contracted by the Department of Geology and Mineral Industries (DOGAMI) and the Oregon Lidar Consortium (OLC) to collect Light Detection and Ranging (lidar) data for the OLC Jackson County site in Oregon. Data were collected to support DOGAMI, OLC, and the USGS 3DEP mission to obtain elevation data to better manage and protect lives, property, and the environment as well as improve planning for future projects.

This report accompanies the delivered lidar data, and documents contract specifications, data acquisition procedures, processing methods, and analysis of the final dataset including lidar accuracy and density. Acquisition dates and acreage are shown in Table 1, deliverable projection information is shown in Table 2, a complete list of contracted deliverables provided to DOGAMI is shown in Table 3, and the project extent is shown in Figure 1.

Table 1: Acquisition dates, acreage, and data types collected on the OLC Jackson County site

Project Site	Contracted Acres	Buffered Acres	Aerial Acquisition Dates	Data Type
OLC Jackson County, Oregon	506,952	522,885	11/14/2022 – 11/22/2022, 6/28/2023 – 6/30/2023	NIR - Lidar

Deliverable Products

Table 2: Deliverable product projection information

Projections	Horizontal Datum	Vertical Datum	Units
Oregon Statewide Lambert	NAD83 (2011)	NAV88 (GEOID18)	International Feet

Table 3: Products delivered to DOGAMI for the OLC Jackson County site

Product Type	File Type	Product Details
Points	LAS v.1.4 (*.las)	<ul style="list-style-type: none"> All Classified Returns
Rasters	3 foot GeoTiffs (*.tif) 3000 ft x 3000 ft tiles	<ul style="list-style-type: none"> Bare Earth Digital Elevation Model (DEM) Highest Hit Digital Surface Model (DSM) Swath Separation Rasters
Rasters	1.5 foot GeoTiffs (*.tif) 3000 ft x 3000 ft tiles	<ul style="list-style-type: none"> Intensity Images
Rasters	3 foot GeoTiffs (*.tif) Project-wide Mosaics	<ul style="list-style-type: none"> Bare Earth Digital Elevation Model (DEM) Highest Hit Digital Surface Model (DSM) Intensity Digital Elevation Model (DEM)
Vectors	Shapefiles (*.shp)	<ul style="list-style-type: none"> Project Boundary 100m Buffered Project Boundary Tile Index Traj Flightlines Ground Survey Points Swath Shapes
Metadata	Extensible Markup Language (*.xml)	<ul style="list-style-type: none"> Metadata
Reports	Adobe Acrobat (*.pdf)	<ul style="list-style-type: none"> Lidar Technical Data Report

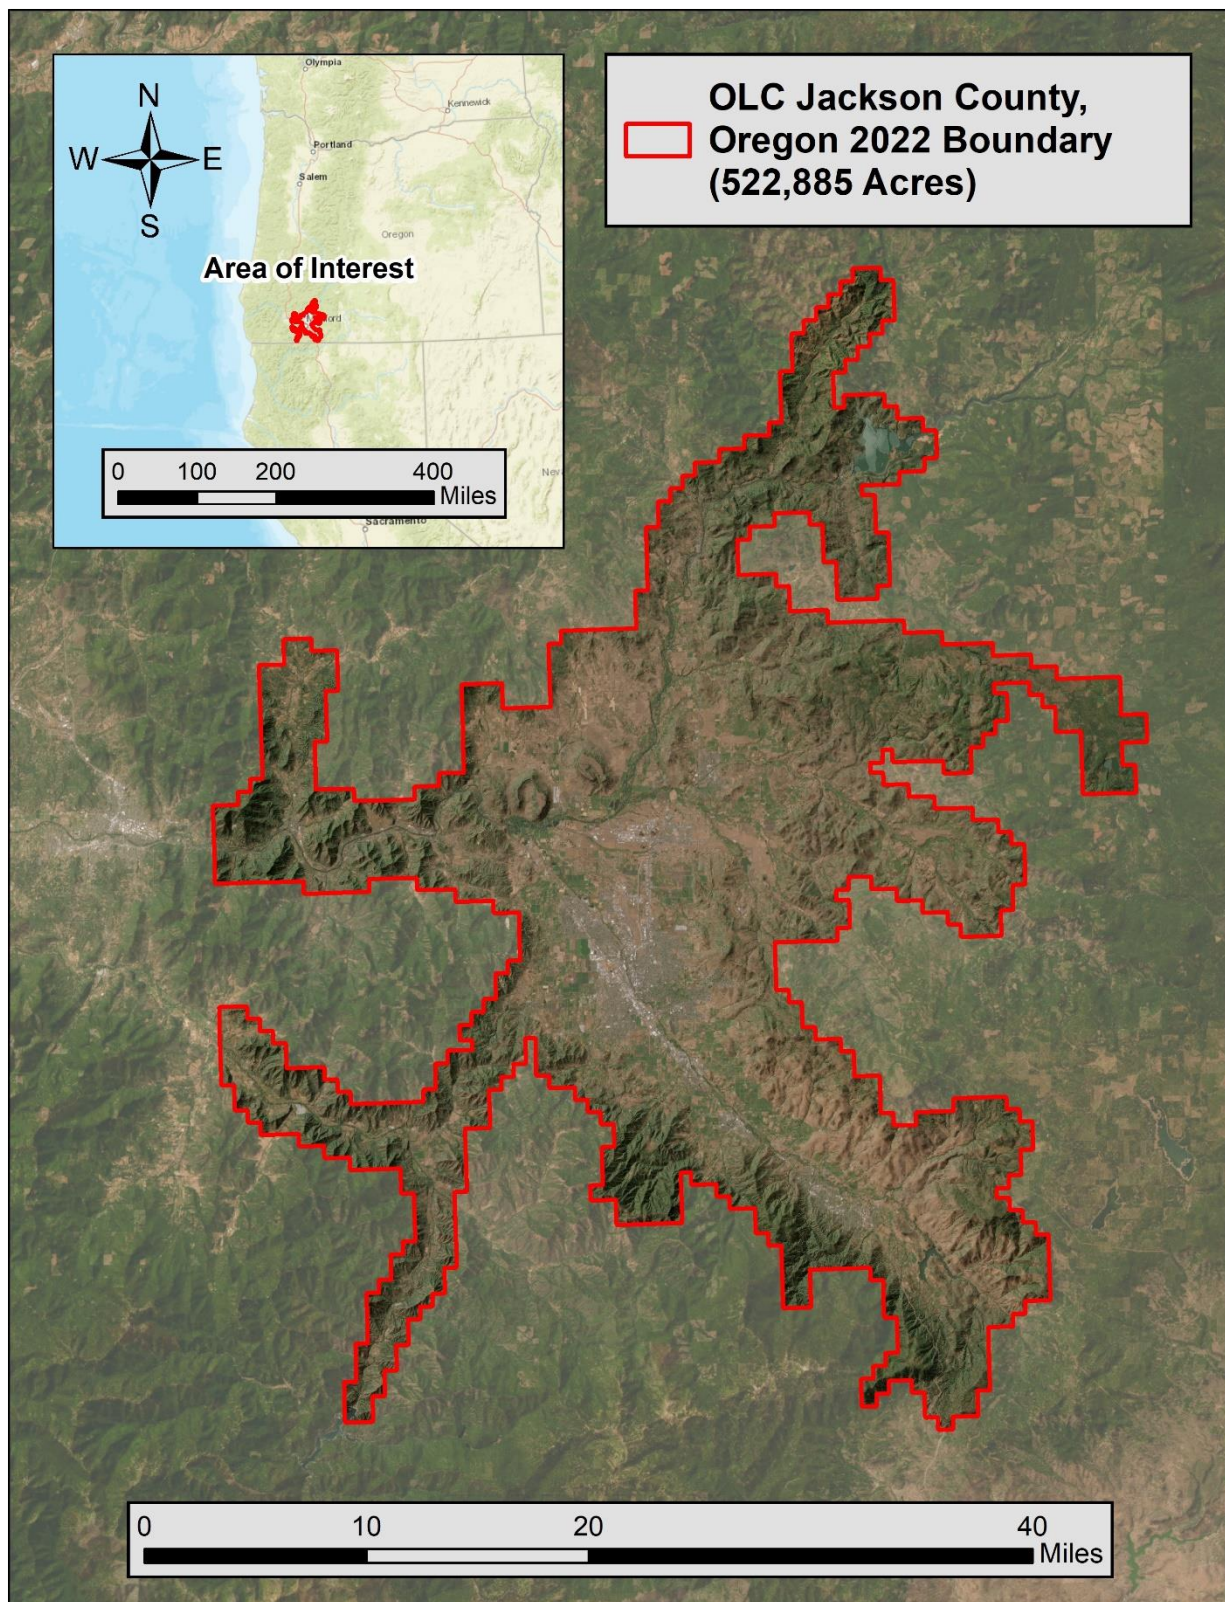


Figure 1: Location map of the OLC Jackson County site in Oregon

NV5 Geospatial's Cessna Caravan



Planning

In preparation for data collection, NV5 Geospatial reviewed the project area and developed a specialized flight plan to ensure complete coverage of the OLC Jackson County lidar study area at the target point density of ≥ 8.0 points/m² (0.74 points/ft²). Acquisition parameters including orientation relative to terrain, flight altitude, pulse rate, scan angle, and ground speed were adapted to optimize flight paths and flight times while meeting all contract specifications. Figure 2 shows these optimized flight paths and dates.

Factors such as satellite constellation availability and weather windows must be considered during the planning stage. Any weather hazards or conditions affecting the flight were continuously monitored due to their potential impact on the daily success of airborne and ground operations. In addition, logistical considerations including private property access and potential air space restrictions were reviewed.

Table 4: Flight Date Table

Date	Flight Line Number	Start Time (Adjusted GPS)	End Time (Adjusted GPS)
11/14/2022	600 – 615	352465566	352476036
11/15/2022	200 – 238, 300 – 318	352551983	352579678
11/16/2022	100 – 103, 105 – 108	352642965	352647510
11/19/2022	400 – 419	352897986	352907659
11/22/2022	500, 502	353144403	353145356
06/28/2023	700 – 726	371975191	371988671
06/30/2023	800 – 808	372141982	372147004

Airborne Survey

Lidar

The lidar survey was accomplished using a Riegl VQ-1560ii-S system mounted in a Cessna Caravan. Table 5 summarizes the settings used to yield an average pulse density of ≥ 8 pulses/m² over the OLC Jackson County project area. The Riegl VQ-1560ii-S laser system can record unlimited range measurements (returns) per pulse, however a maximum of 15 returns can be stored due to LAS v1.4 file limitations. The typical number of returns digitized from a single pulse range from 1 to 9 for the OLC Jackson County project area. It is not uncommon for some types of surfaces (e.g., dense vegetation or water) to return fewer pulses to the lidar sensor than the laser originally emitted. The discrepancy between first return and overall delivered density will vary depending on terrain, land cover, and the prevalence of water bodies. All discernible laser returns were processed for the output dataset. Figure 2 shows the flightlines acquired using these lidar specifications.

Table 5: Lidar specifications and aerial survey settings

Parameter	NIR Laser
Acquisition Dates	11/14/2022 – 11/22/2022, 06/28/2023 – 06/30/2023
Aircraft Used	Cessna Caravan and Cessna Conquest
Sensor	Riegl
Laser Channel	VQ-1560ii-S
Maximum Returns	15
Resolution/Density	Average 8 pulses/m ²
Nominal Pulse Spacing	0.35 m
Survey Altitude (AGL)	2500 m
Survey speed	160 knots
Field of View	58.5°
Mirror Scan Rate	Uniform Point Spacing
Target Pulse Rate	827 kHz
Pulse Length	3 ns
Laser Pulse Footprint Diameter	57.5 cm
Central Wavelength	1064 nm
Pulse Mode	Multiple Times Around (MTA)
Beam Divergence	0.23 mrad
Swath Width	2800 m
Swath Overlap	55%
Intensity	16-bit
Vertical Accuracy	RMSE _z (Non-Vegetated) ≤ 10 cm
Horizontal Accuracy	Horizontal Accuracy ≤ 30 cm
Relative Accuracy	Relative Accuracy ≤ 6 cm



Riegl VQ-1560ii-S

All areas were surveyed with an opposing flight line side-lap of $\geq 50\%$ ($\geq 100\%$ overlap) in order to reduce laser shadowing and increase surface laser painting. To accurately solve for laser point position (geographic coordinates x , y and z), the positional coordinates of the airborne sensor and the orientation of the aircraft to the horizon (attitude) were recorded continuously throughout the lidar data collection mission. Position of the aircraft was measured twice per second (2 Hz) by an onboard differential GPS unit, and aircraft attitude was measured 200 times per second (200 Hz) as pitch, roll and yaw (heading) from an onboard inertial measurement unit (IMU). To allow for post-processing correction and calibration, aircraft and sensor position and attitude data are indexed by GPS time.

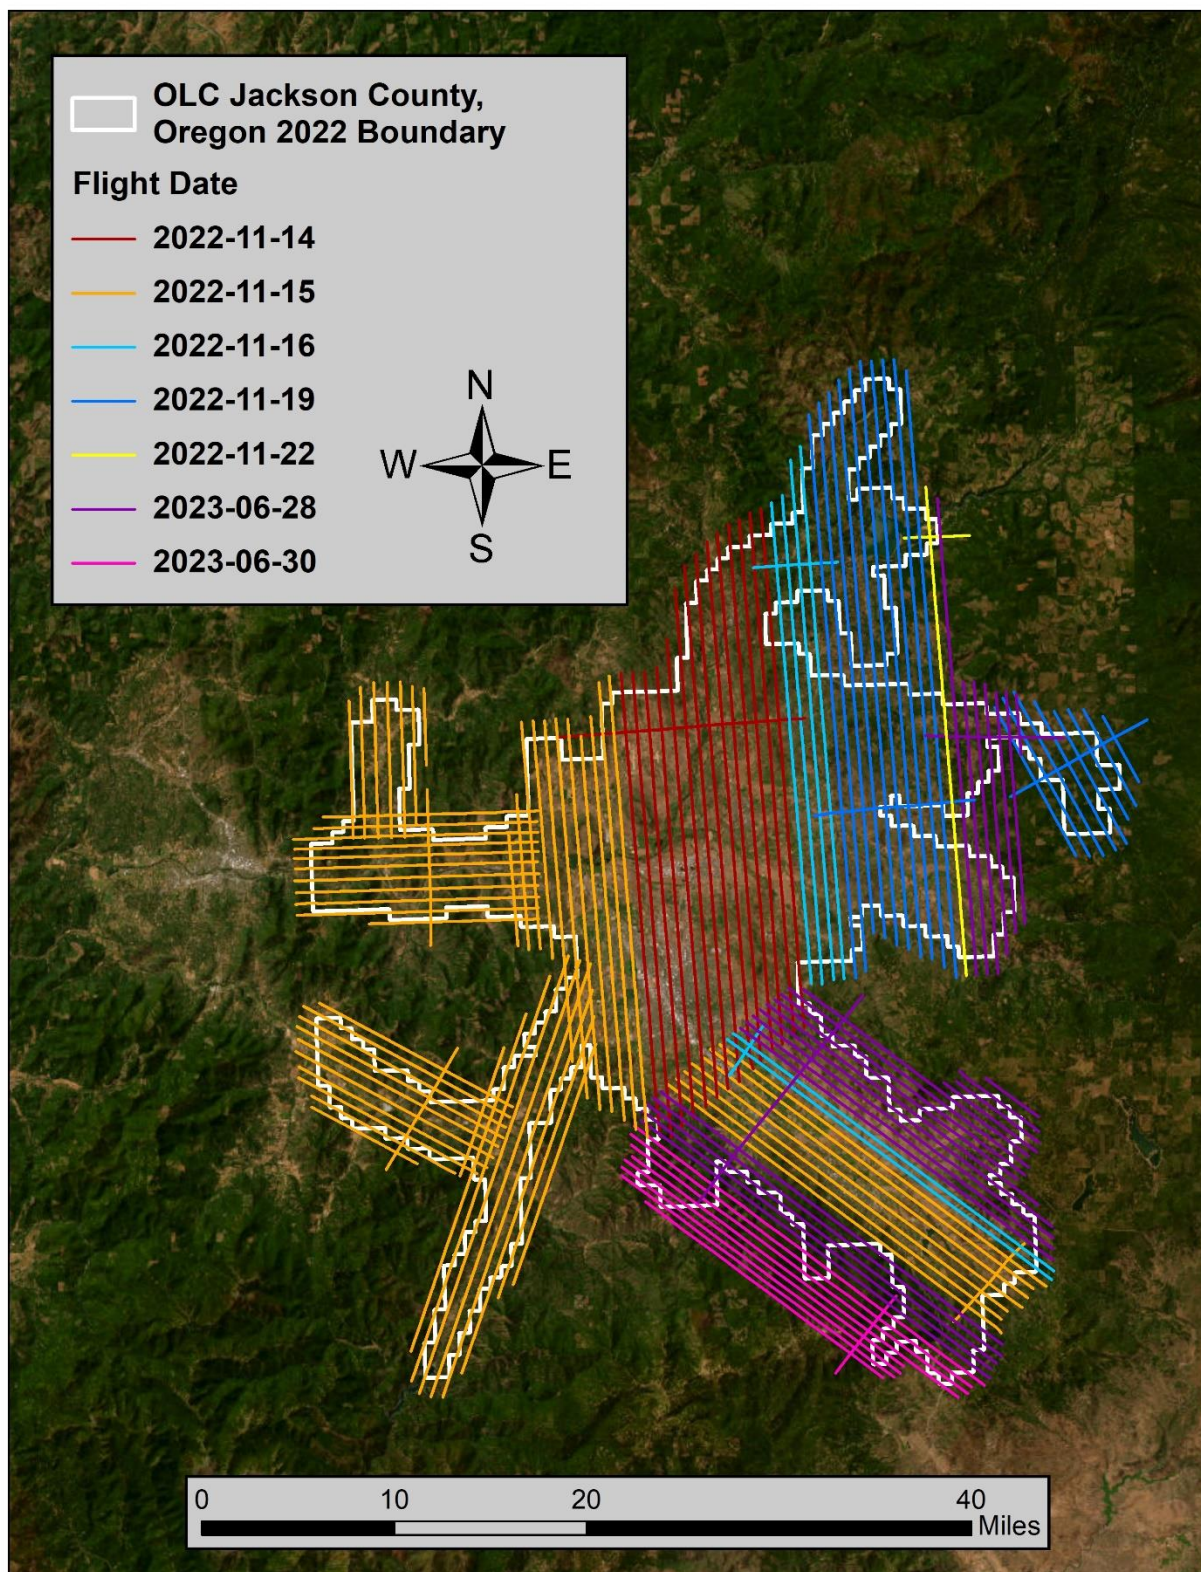


Figure 2: Flightlines map

Ground Survey

Ground control surveys, including monumentation and ground survey points (GSPs) were conducted to support the airborne acquisition. Ground control data were used to geospatially correct the aircraft positional coordinate data and to perform quality assurance checks on final lidar data.

Base Stations

Base stations were utilized for collection of ground survey points using real time kinematic (RTK) survey techniques.

Base station locations were selected with consideration for satellite visibility, field crew safety, and optimal location for GSP coverage. NV5 Geospatial utilized four permanent real-time network (RTN) base stations, three from the Oregon Real-time GNSS Network (ORGN) and one from the Hexagon SmartNet network for the OLC Jackson County Lidar project. NV5 Geospatial also established three new monuments using 6" mag hub nails with orange survey washers and utilized one existing monument set using 5/8" x 30" rebar topped with a stamped 2 ½" aluminum cap (Figure 3). NV5's professional land surveyor, Evon Silvia (ORPLS#81104) oversaw and certified the ground survey.



NV5 Geospatial-Established Monument

Table 6: Base station positions for the OLC Jackson County acquisition. Coordinates are on the NAD83 (2011) datum, epoch 2010.00

Monument ID	Owner	Type	Latitude	Longitude	Ellipsoid (meters)
ASHL	ORGN	RTN	42° 10' 50.47299"	-122° 40' 12.55241"	609.147
CTPT	ORGN	RTN	42° 22' 36.08473"	-122° 53' 38.19500"	370.975
GTPS	ORGN	RTN	42° 26' 04.16523"	-123° 17' 50.51054"	279.017
ORMF	SmartNet	RTN	42° 22' 47.58079"	-122° 53' 04.05098"	380.177
JACKSON22_01	NV5	MAGNAIL	42° 32' 44.17535"	-122° 49' 35.49220"	404.454
JACKSON22_03	NV5	MAGNAIL	42° 28' 10.52855"	-122° 27' 25.33241"	899.664
JACKSON22_04	NV5	MAGNAIL	42° 45' 03.74433"	-122° 41' 56.04042"	506.562
ROGUE_01_RESET	NV5	ALCAP	42° 14' 15.22572"	-123° 04' 13.02674"	403.472

NV5 Geospatial utilized static Global Navigation Satellite System (GNSS) data collected at 1 Hz recording frequency for each base station. During post-processing, the static GNSS data were triangulated with nearby Continuously Operating Reference Stations (CORS) using the Online Positioning User Service (OPUS¹) for precise positioning. Multiple independent sessions over the same monument were processed to confirm antenna height measurements and to refine position accuracy.

Monuments were established according to the national standard for geodetic control networks, as specified in the Federal Geographic Data Committee (FGDC) Geospatial Positioning Accuracy Standards for geodetic networks.² This standard provides guidelines for classification of monument quality at the 95% confidence interval as a basis for comparing the quality of one control network to another. The monument rating for this project is shown in Table 7.

Table 7: Federal Geographic Data Committee monument rating for network accuracy

Direction	Rating
1.96 * St Dev _{NE} :	0.020 m
1.96 * St Dev _Z :	0.050 m

For the OLC Jackson County Lidar project, the monument coordinates contributed no more than 5.6 cm of positional error to the geolocation of the final ground survey points and lidar, with 95% confidence.

Ground Survey Points (GSPs)

Ground survey points were collected using real time kinematic (RTK) survey techniques. For RTK surveys, a roving receiver receives corrections from a nearby base station or Real-Time Network (RTN) via radio or cellular network, enabling rapid collection of points with relative errors less than 1.5 cm horizontal and 2.0 cm vertical. These surveys record data while stationary for at least five seconds, calculating the position using at least three one-second epochs. All GSP measurements were made during periods with a Position Dilution of Precision (PDOP) of ≤ 3.0 with at least six satellites in view of the stationary and roving receivers. See Table 8 for Trimble unit specifications.

GSPs were collected in areas where good satellite visibility was achieved on paved roads and other hard surfaces such as gravel or packed dirt roads. GSP measurements were not taken on highly reflective surfaces such as center line stripes or lane markings on roads due to the increased noise seen in the laser returns over these surfaces. GSPs were collected within as many flightlines as possible; however, the distribution of GSPs depended on ground access constraints and monument locations and may not be equably distributed throughout the study area (Figure 3).

¹ OPUS is a free service provided by the National Geodetic Survey to process corrected monument positions.
<http://www.ngs.noaa.gov/OPUS>.

² Federal Geographic Data Committee, Geospatial Positioning Accuracy Standards (FGDC-STD-007.2-1998). Part 2: Standards for Geodetic Networks, Table 2.1, page 2-3: [FGDC Standards Website](#)






Table 8: NV5 Geospatial ground survey equipment identification

Receiver Model	Antenna	OPUS Antenna ID	Use
Trimble R12	Integrated Antenna	TRMR12	Rover
Trimble R7	Zephyr GNSS Geodetic Model 2 RoHS	TRM57971.00	Static
Trimble R10 Model 2	Integrated Antenna	TRMR10-2	Static

Land Cover Class

In addition to ground survey points, land cover class checkpoints were collected throughout the study area to evaluate vertical accuracy. Vertical accuracy statistics were calculated for all land cover types to assess confidence in the lidar derived ground models across land cover classes (Table 9, see Lidar Accuracy Assessments, page 25).

Table 9: Land Cover Types and Descriptions

Land cover type	Land cover code	Example	Description	Accuracy Assessment Type
Shrub	SH		Low growth shrub	VVA
Tall Grass	TG		Herbaceous grasslands in advanced stages of growth	VVA
Forest	FR		Forested areas	VVA
Bare Earth	BARE, BE		Areas of bare earth surface	NVA
Urban	UA		Areas dominated by urban development, including parks	NVA


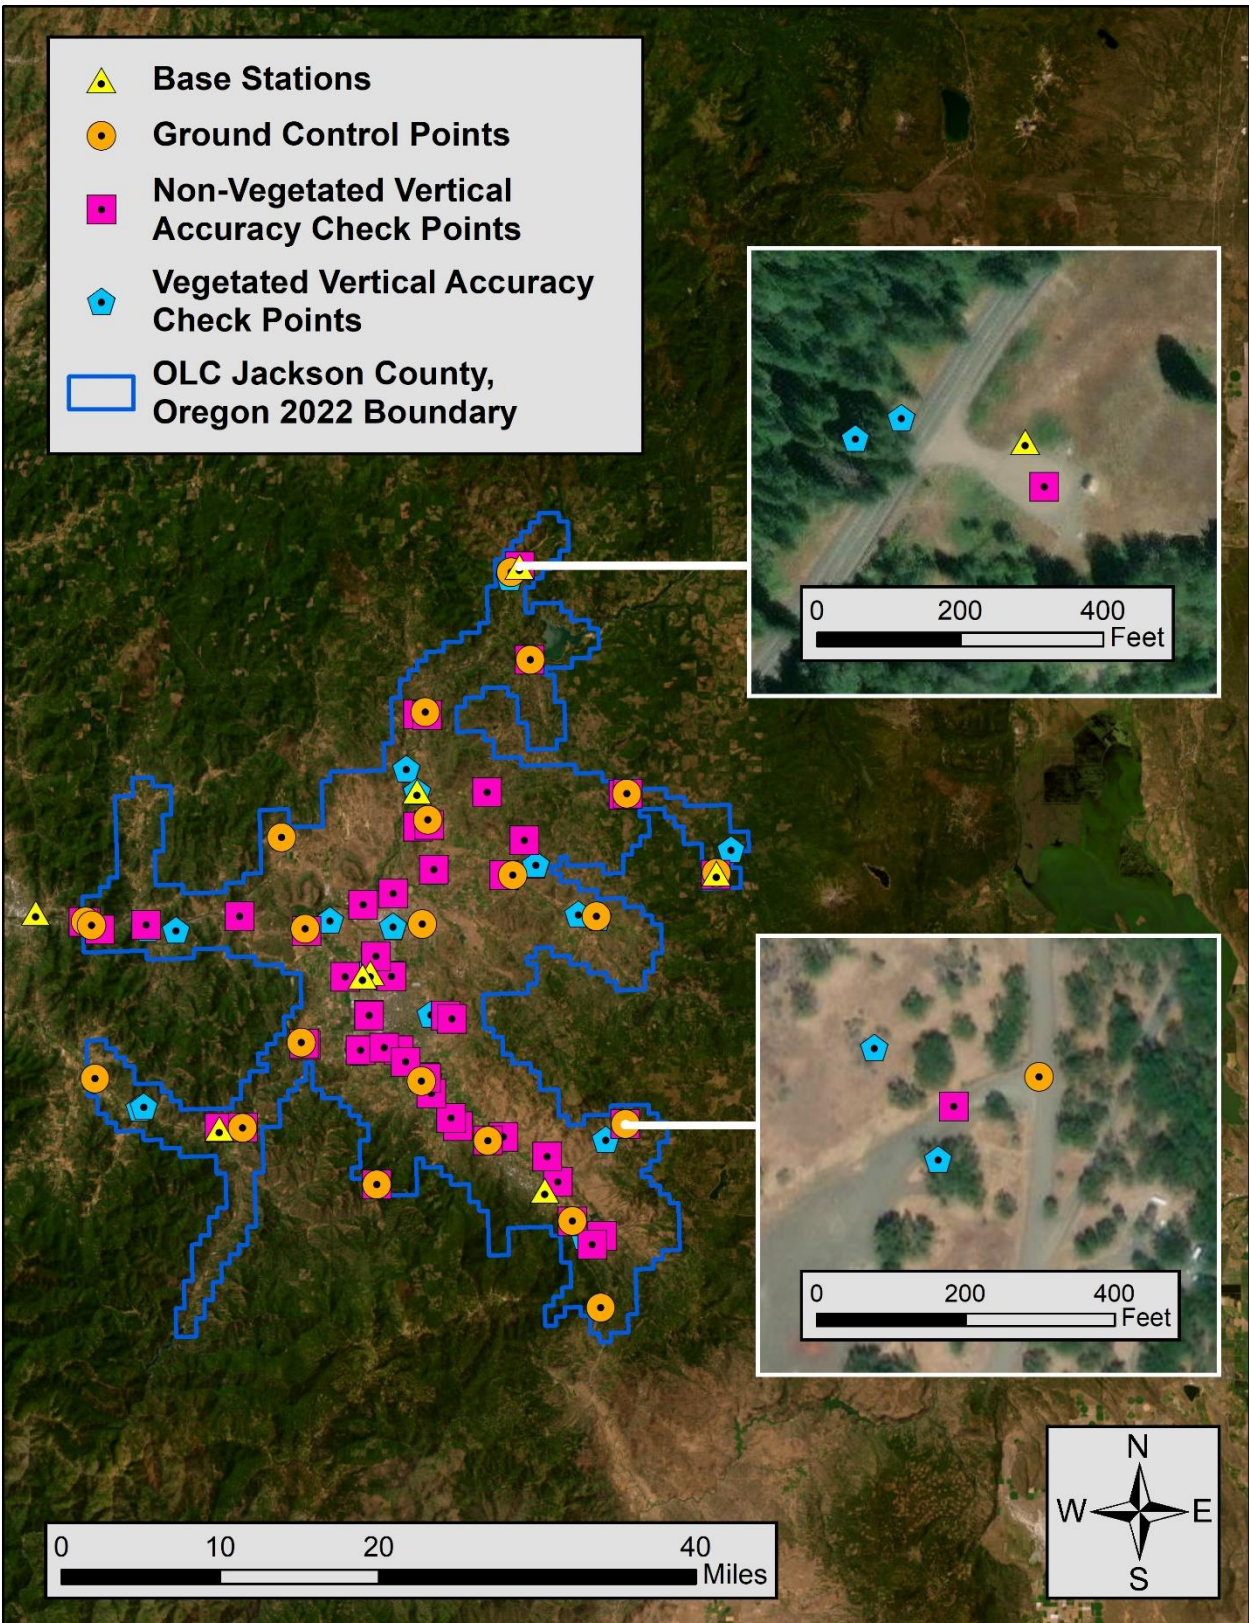


Figure 3: Ground survey location map

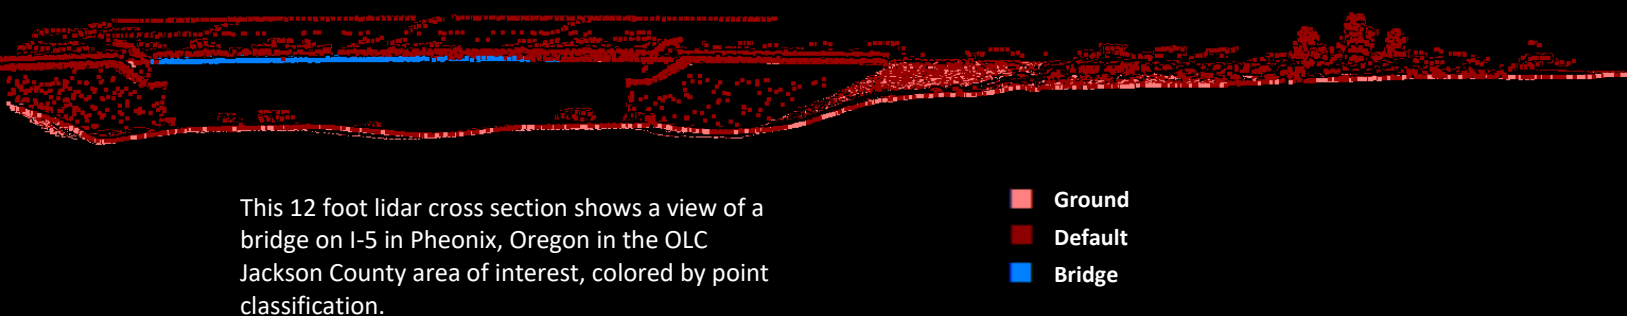

NIR Lidar Data

Applanix + POSPac software was used for post-processing of airborne GPS and inertial data (IMU), which is critical to the positioning and orientation of the lidar sensor during all flights. Applanix POSPac combines aircraft raw trajectory data with stationary GPS base station data yielding a “Smoothed Best Estimate Trajectory” (SBET) necessary for additional post processing software to develop the resulting geo-referenced point cloud from the lidar missions (Table 12).

During the sensor trajectory processing (combining GPS & IMU datasets) certain statistical graphs and tables are generated within the Applanix POSPac processing environment which are commonly used as indicators of processing stability and accuracy. This data for analysis includes max horizontal and vertical GPS variance, separation plot, altitude plot, PDOP plot, base station baseline length, processing mode, number of satellite vehicles, and mission trajectory.

Point clouds were created using the RiPROCESS software. The generated point cloud is the mathematical three-dimensional composite of all returns from all laser pulses as determined from the aerial mission. The point cloud is imported into GeoCue distributive processing software. Imported data is tiled and then calibrated using TerraMatch and proprietary software. Using TerraScan, the vertical accuracy of the surveyed ground control is tested and any bias is removed from the data. TerraScan and TerraModeler software packages are then used for automated data classification (Table 11) and manual cleanup. The data are manually reviewed and any remaining artifacts removed using functionality provided by TerraScan and TerraModeler.

DEMs and Intensity Images are then generated using NV5 Geospatial proprietary software. In the bare earth surface model, above-ground features are excluded from the data set. ESRI ArcMap and Global

Mapper are used as a final check of the bare earth dataset. Finally, proprietary software is used to perform statistical analysis of the LAS files (Table 10).

Table 10: Software used for statistical analysis

Statistical Software	Version
Applanix + POSPac	8.7
LASMonkey	2.6.7
RiPROCESS	1.8.6
GeoCue	2020.1.22.1
ESRI Arc Map	10.8
TerraModeler	21.008
TerraScan	21.016

Table 11: ASPRS LAS classification standards applied to the OLC Jackson County dataset

Classification Number	Classification Name	Point Count	Classification Description
1	Default/Unclassified	40676737693	Laser returns that are not included in the ground class, composed of vegetation and anthropogenic features
2	Ground	1288126187	Laser returns that are determined to be ground using automated and manual cleaning algorithms
7W	Noise	16764791	Laser returns that are often associated with birds, scattering from reflective surfaces, or artificial points below the ground surface
17	Bridge	110700	Bridge decks
18W	High Noise	2740369	Laser returns that are often associated with birds, scattering from reflective surfaces.

Table 12: Lidar processing workflow

Lidar Processing Step	Software Used
Resolve kinematic corrections for aircraft position data using kinematic aircraft GPS and static ground GPS data. Develop a smoothed best estimate of trajectory (SBET) file that blends post-processed aircraft position with sensor head position and attitude recorded throughout the survey.	POSPac MMS v.8.9
Calculate laser point position by associating SBET position to each laser point return time, scan angle, intensity, etc. Create raw laser point cloud data for the entire survey in *.las (ASPRS v. 1.4) format. Convert data to orthometric elevations by applying a geoid correction.	RiUnite v.1.0.3
Import raw laser points into manageable blocks to perform manual relative accuracy calibration and filter erroneous points. Classify ground points for individual flight lines.	TerraScan v.19.005
Using ground classified points per each flight line, test the relative accuracy. Perform automated line-to-line calibrations for system attitude parameters (pitch, roll, heading), mirror flex (scale) and GPS/IMU drift. Calculate calibrations on ground classified points from paired flight lines and apply results to all points in a flight line. Use every flight line for relative accuracy calibration.	StripAlign v.2.21
Classify resulting data to ground and other client designated ASPRS classifications (Table 11). Assess statistical absolute accuracy via direct comparisons of ground classified points to ground control survey data.	TerraScan v.19.005 Terra Match v. 19.002 TerraModeler v.19.003
Generate bare earth models as triangulated surfaces. Generate highest hit models as a surface expression of all classified points. Export all surface models GeoTIFFs at a 3.0 foot pixel resolution.	LAS Product Creator 4.0 (NV5 Geospatial proprietary) ArcMap v. 10.8.1
Correct intensity values for variability and export intensity images as GeoTIFFs at a 1.5 foot pixel resolution.	Las Monkey 2.6.8 (NV5 Geospatial proprietary) LAS Product Creator 4.0 (NV5 Geospatial proprietary)

Feature Extraction

Intensity Image Processing

Intensity images represent reflectivity values collected by the lidar sensor during acquisition. NV5 Geospatial proprietary software generates intensity images using all valid first returns and excluding those flagged with a withheld bit. Intensity images are linearly scaled to a value range specific to the project area and sensor to standardize the images and reduce differences between individual flightlines. Appropriate horizontal projection information as well as applicable header values are written during product generation. NV5 Geospatial uses a proprietary tool called FOCUS on Delivery to check all formatting requirements of the images against what is required before final delivery.


Swath Separation Raster Processing

Swath Separation Images are rasters that represent the interswath alignment between flight lines and provide a qualitative evaluation of the positional quality of the point cloud. NV5 Geospatial proprietary software generated 1-meter raster images in GeoTIFF format using the first returns from all the classes, excluding points flagged with the withheld bit, and using a grid based average algorithm. Images are generated with 75% intensity opacity and four absolute 8-cm intervals (see Figure 4 below for interval coloring). Intensity images are linearly scaled to a value range specific to the project area and sensor to standardize the images and reduce differences between individual flightlines. Appropriate horizontal projection information as well as applicable header values are written to the file during product generation. NV5 Geospatial uses a proprietary tool called FOCUS on Delivery to check all formatting requirements of the images against what is required before final delivery.

	0-8cm
	8-16cm
	16-24cm
	>24cm

Figure 4: The color ramp values used in the OLC Jackson County project

This 12 foot lidar cross section shows a view of an overpass on I-5 near Pheonix, Oregon in the OLC Jackson County area of interest, colored by laser point echo.

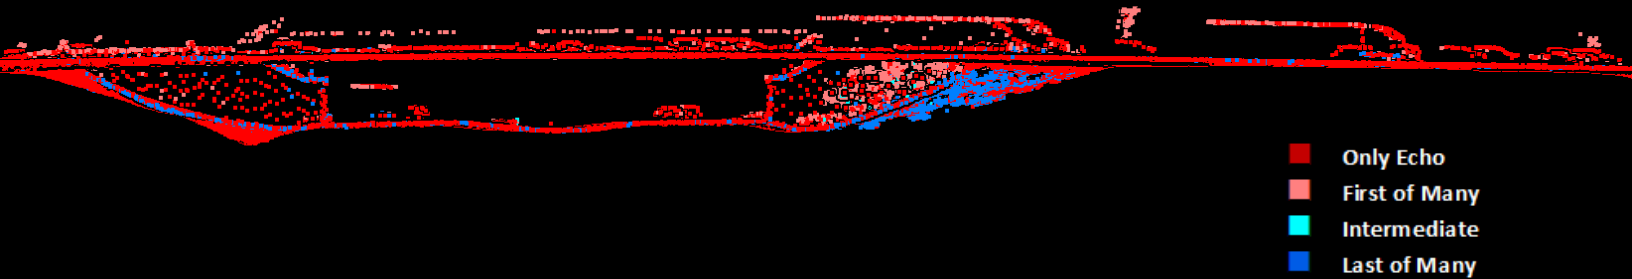

Lidar Density

The acquisition parameters were designed to acquire an average first-return density of 8 points/m² (0.74 points/ft²). First return density describes the density of pulses emitted from the laser that return at least one echo to the system. Multiple returns from a single pulse were not considered in first return density analysis. Some types of surfaces (e.g., breaks in terrain, water and steep slopes) may have returned fewer pulses than originally emitted by the laser. First returns typically reflect off the highest feature on the landscape within the footprint of the pulse. In forested or urban areas the highest feature could be a tree, building or power line, while in areas of unobstructed ground, the first return will be the only echo and represents the bare earth surface.

The density of ground-classified lidar returns was also analyzed for this project. Terrain character, land cover, and ground surface reflectivity all influenced the density of ground surface returns. In vegetated areas, fewer pulses may penetrate the canopy, resulting in lower ground density.

The average first-return density of lidar data for the OLC Jackson County project was 1.48 points/ft² (15.92 points/m²) while the average ground classified density was 0.57 points/ft² (6.10 points/m²) (Table 13). The statistical and spatial distributions of first return densities and classified ground return densities per 100 m x 100 m cell are portrayed in Figure 5 through Figure 7.

Table 13: Average lidar point densities

Classification	Point Density
First-Return	1.48 points/ft ² 15.92 points/m ²
Ground Classified	0.57 points/ft ² 6.10 points/m ²

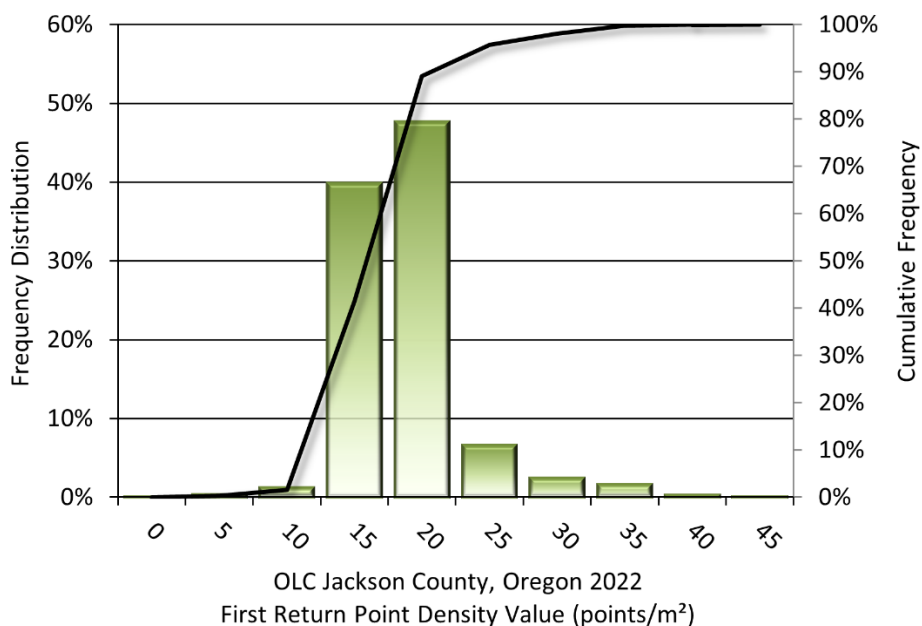


Figure 5: Frequency distribution of first return point density values per 100 x 100 m cell

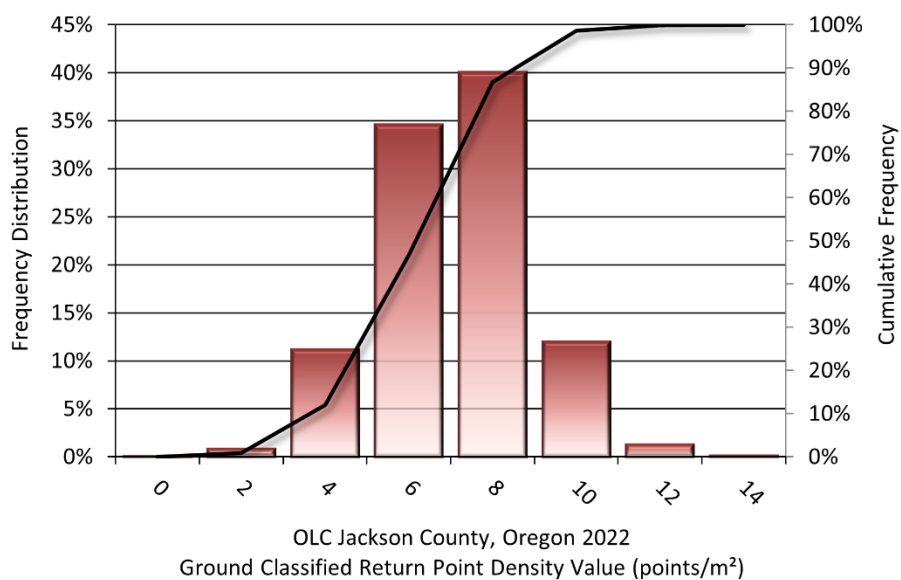


Figure 6: Frequency distribution of ground-classified return point density values per 100 x 100 m cell

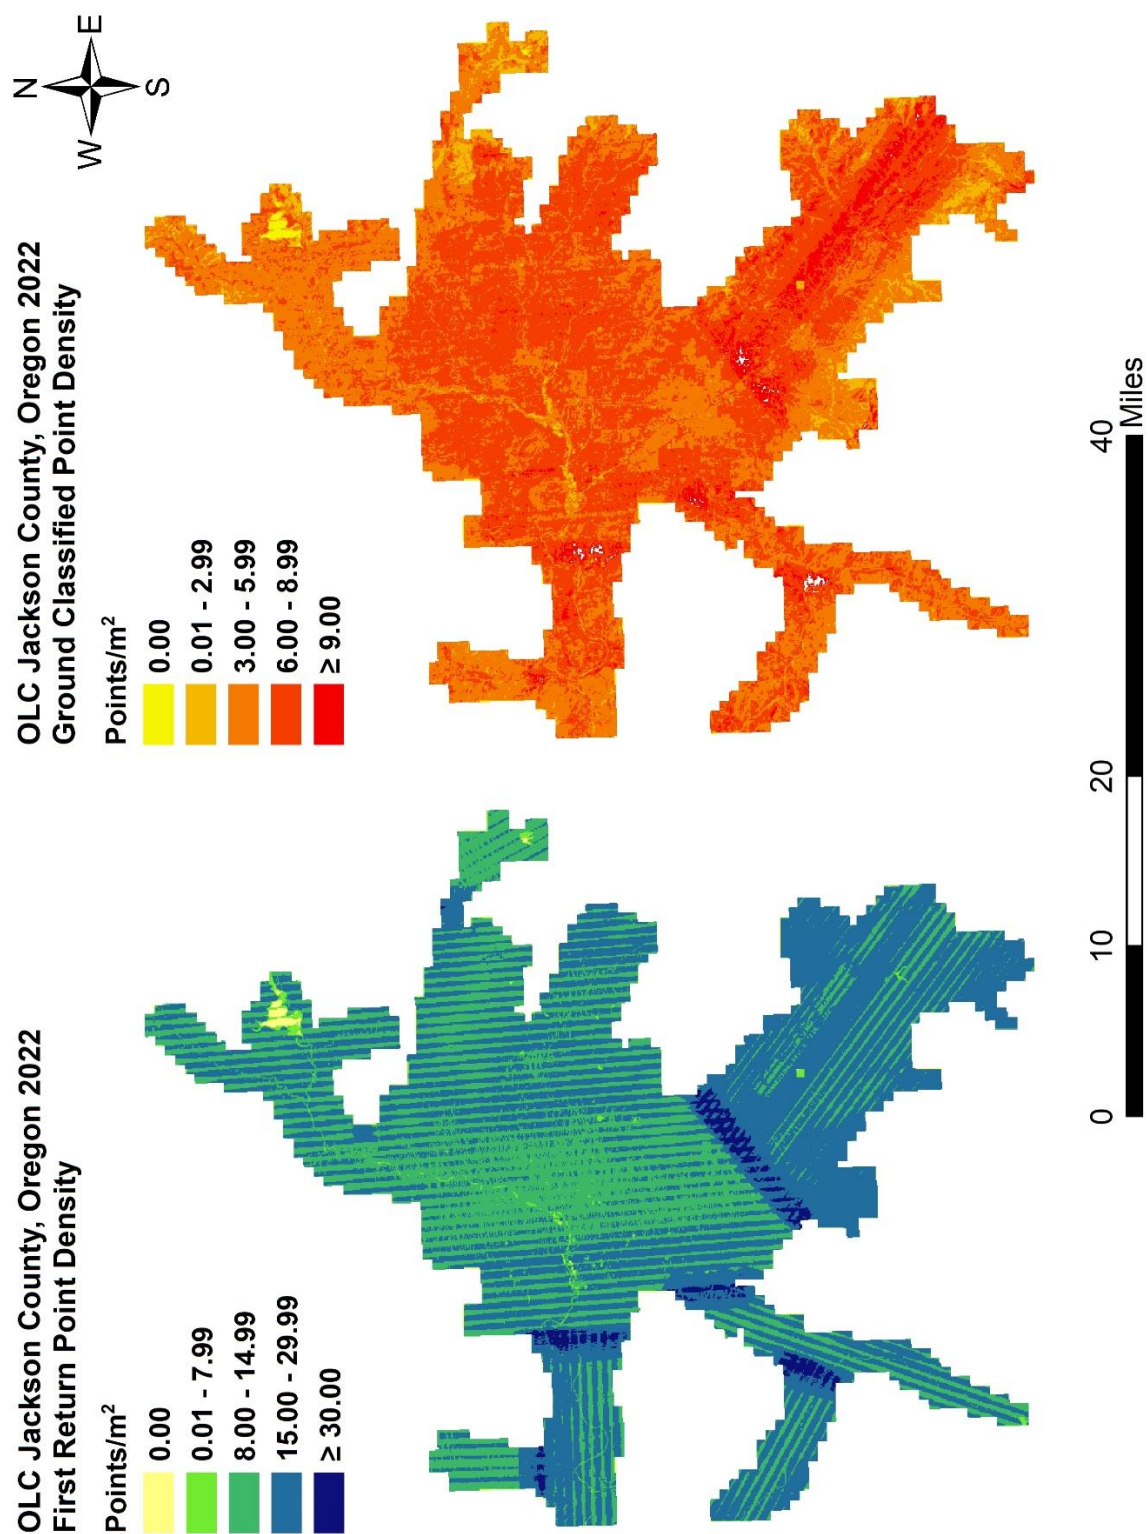


Figure 7: First return and ground-classified point density map for the OLC Jackson County site (100 m x 100 m cells)

Lidar Accuracy Assessments

The accuracy of the lidar data collection can be described in terms of absolute accuracy (the consistency of the data with external data sources) and relative accuracy (the consistency of the dataset with itself). See Appendix A for further information on sources of error and operational measures used to improve relative accuracy.

Lidar Non-Vegetated Vertical Accuracy

Absolute accuracy was assessed using Non-Vegetated Vertical Accuracy (NVA) reporting designed to meet guidelines presented in the FGDC National Standard for Spatial Data Accuracy³. NVA compares known ground check point data that were withheld from the calibration and post-processing of the lidar point cloud to the triangulated surface generated by the classified lidar point cloud as well as the derived gridded bare earth DEM. NVA is a measure of the accuracy of lidar point data in open areas where the lidar system has a high probability of measuring the ground surface and is evaluated at the 95% confidence interval ($1.96 * RMSE$), as shown in Table 14.

The mean and standard deviation (σ) of divergence of the ground surface model from quality assurance point coordinates are also considered during accuracy assessment. These statistics assume the error for x, y and z is normally distributed, and therefore the skew and kurtosis of distributions are also considered when evaluating error statistics. For the OLC Jackson County survey, 54 ground checkpoints were withheld from the calibration and post processing of the lidar point cloud, with resulting non-vegetated vertical accuracy of 0.146 feet (0.045 meters) as compared to classified LAS, and 0.146 feet (0.045 meters) as compared to the bare earth DEM, with 95% confidence (Figure 8, Figure 9).

NV5 Geospatial also assessed absolute accuracy using 22 ground control points. Although these points were used in the calibration and post-processing of the lidar point cloud, they still provide a good indication of the overall accuracy of the lidar dataset, and therefore have been provided in Table 14 and Figure 10.

³ Federal Geographic Data Committee, ASPRS POSITIONAL ACCURACY STANDARDS FOR DIGITAL GEOSPATIAL DATA EDITION 1, Version 1.0, NOVEMBER 2014.
https://www.asprs.org/a/society/committees/standards/Positional_Accuracy_Standards.pdf.

Table 14: Absolute accuracy results

Parameter	NVA, as compared to classified LAS	NVA, as compared to bare earth DEM	Ground Control Points
Sample	54 points	54 points	22 points
95% Confidence (1.96*RMSE)	0.146 ft 0.045 m	0.146 ft 0.045 m	0.141 ft 0.043 m
Average	-0.026 ft -0.008 m	-0.026 ft -0.008 m	-0.019 ft -0.006 m
Median	-0.025 ft -0.008 m	-0.025 ft -0.008 m	-0.018 ft -0.006 m
RMSE	0.075 ft 0.023 m	0.075 ft 0.023 m	0.072 ft 0.022 m
Standard Deviation (1σ)	0.071 ft 0.021 m	0.071 ft 0.021 m	0.071 ft 0.022 m

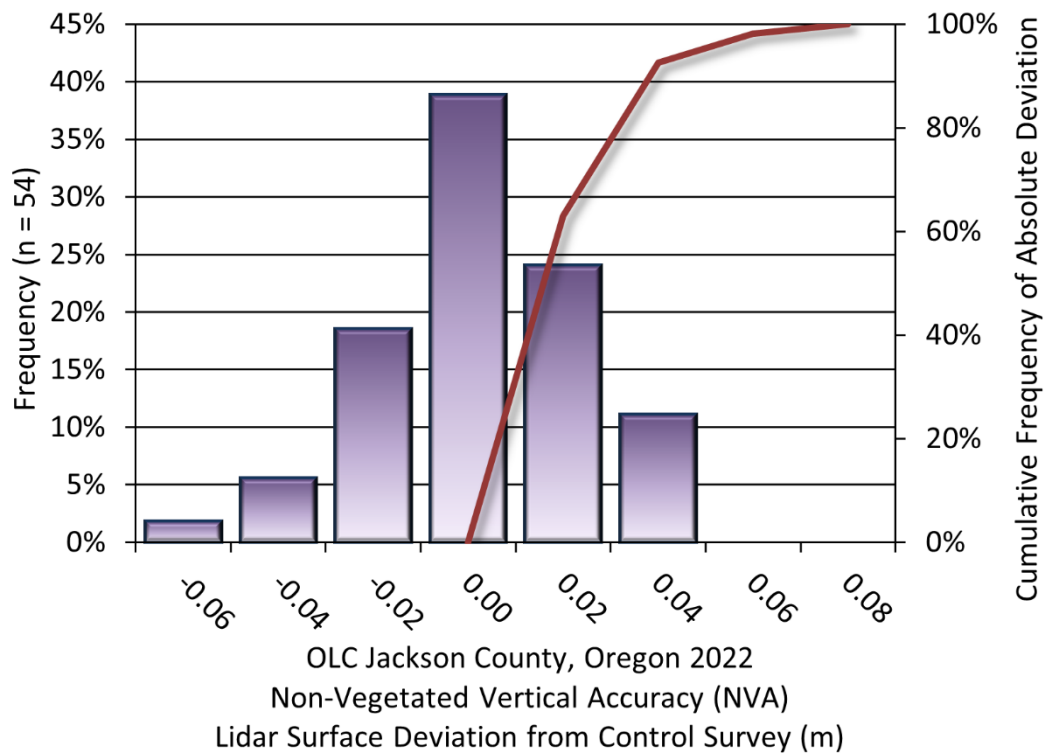


Figure 8: Frequency histogram for lidar classified LAS deviation from ground check point values (NVA)

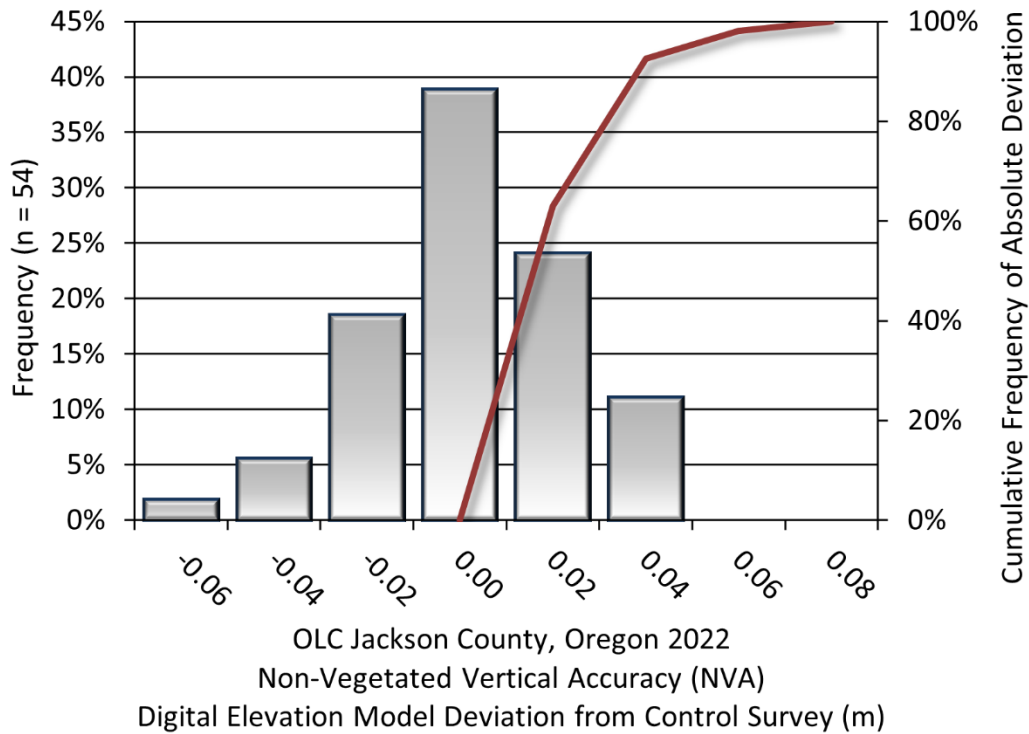


Figure 9: Frequency histogram for the lidar bare earth DEM surface deviation from ground check point values (NVA)

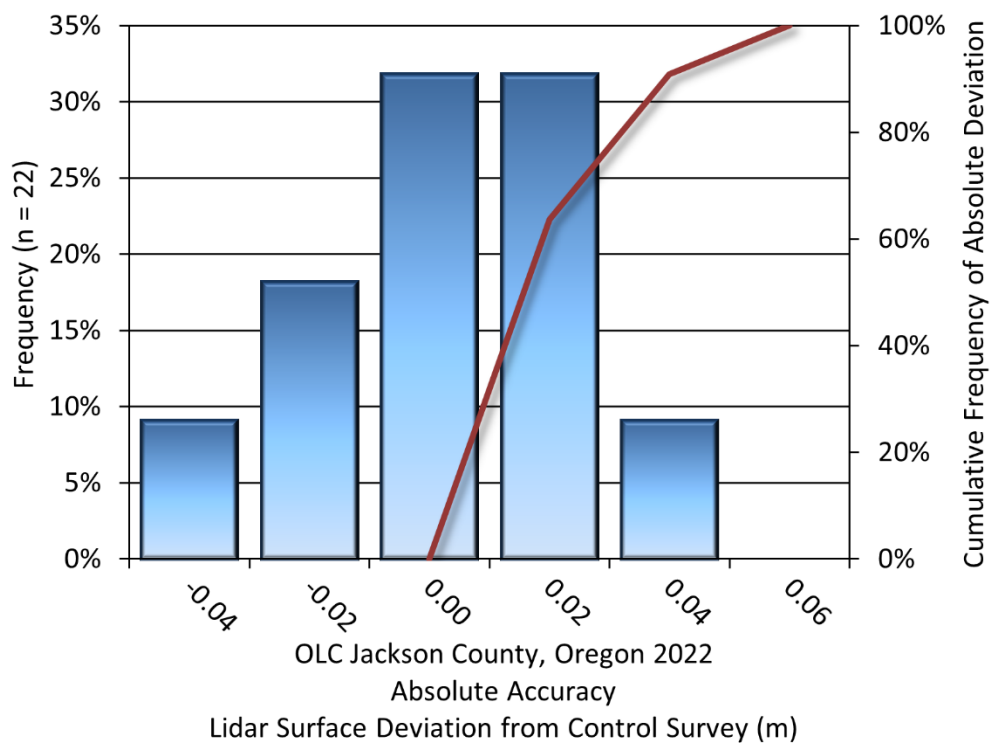


Figure 10: Frequency histogram for the lidar surface deviation from ground control point values

Lidar Vegetated Vertical Accuracies

NV5 Geospatial also assessed vertical accuracy using Vegetated Vertical Accuracy (VVA) reporting. VVA compares known ground check point data collected over vegetated surfaces using land class descriptions to the triangulated ground surface generated by the ground classified lidar points. For the OLC Jackson County survey, 46 vegetated checkpoints were collected, with resulting vegetated vertical accuracy of 0.531 feet (0.162 meters) as compared to the classified LAS, and 0.531 feet (0.162 meters) as compared to the bare earth DEM evaluated at the 95th percentile (Table 15, Figure 11, and Figure 12).

Table 15: Vegetated vertical accuracy results

Parameter	VVA, as compared to classified LAS	VVA, as compared to bare earth DEM
Sample	46 points	46 points
95 th Percentile	0.531 ft 0.162 m	0.531 ft 0.162 m
Average	0.253 ft 0.077 m	0.253 ft 0.077 m
Median	0.230 ft 0.070 m	0.230 ft 0.070 m
RMSE	0.320 ft 0.098 m	0.320 ft 0.098 m
Standard Deviation (1 σ)	0.197 ft 0.060 m	0.197 ft 0.060 m

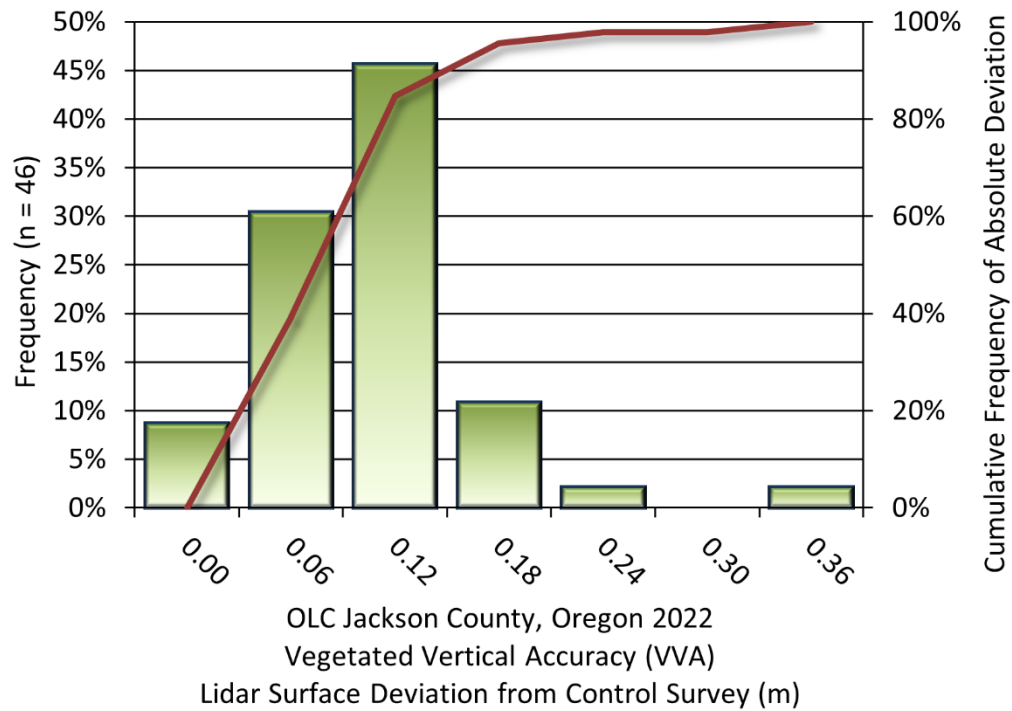


Figure 11: Frequency histogram for the lidar surface deviation from all land cover class point values (VVA)

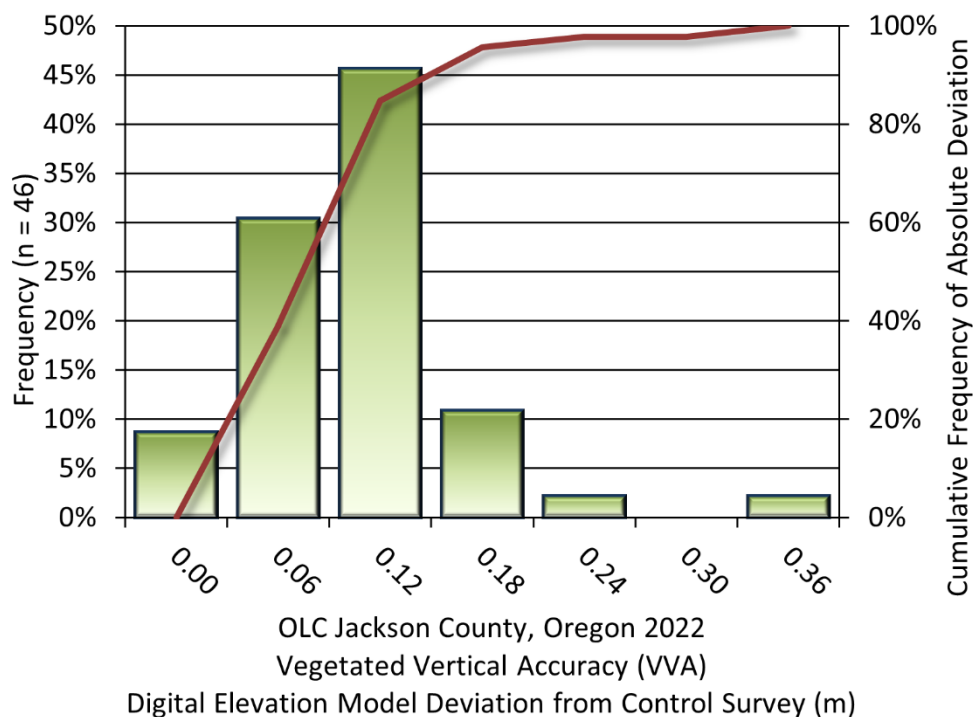


Figure 12: Frequency histogram for the lidar bare earth DEM deviation from vegetated check point values (VVA)

Lidar Relative Vertical Accuracy

Relative vertical accuracy refers to the internal consistency of the data set as a whole: the ability to place an object in the same location given multiple flight lines, GPS conditions, and aircraft attitudes. When the lidar system is well calibrated, the swath-to-swath vertical divergence is low (<0.10 meters). The relative vertical accuracy was computed by comparing the ground surface model of each individual flight line with its neighbors in overlapping regions. The average (mean) line to line relative vertical accuracy for the OLC Jackson County Lidar project was 0.105 feet (0.032 meters) (Table 16, Figure 13).

Table 16: Relative accuracy results

Parameter	Relative Accuracy
Sample	140 flight line surfaces
Average	0.105 ft 0.032 m
Median	0.106 ft 0.032 m
RMSE	0.113 ft 0.034 m
Standard Deviation (1 σ)	0.023 ft 0.007 m
1.96 σ	0.045 ft 0.014 m

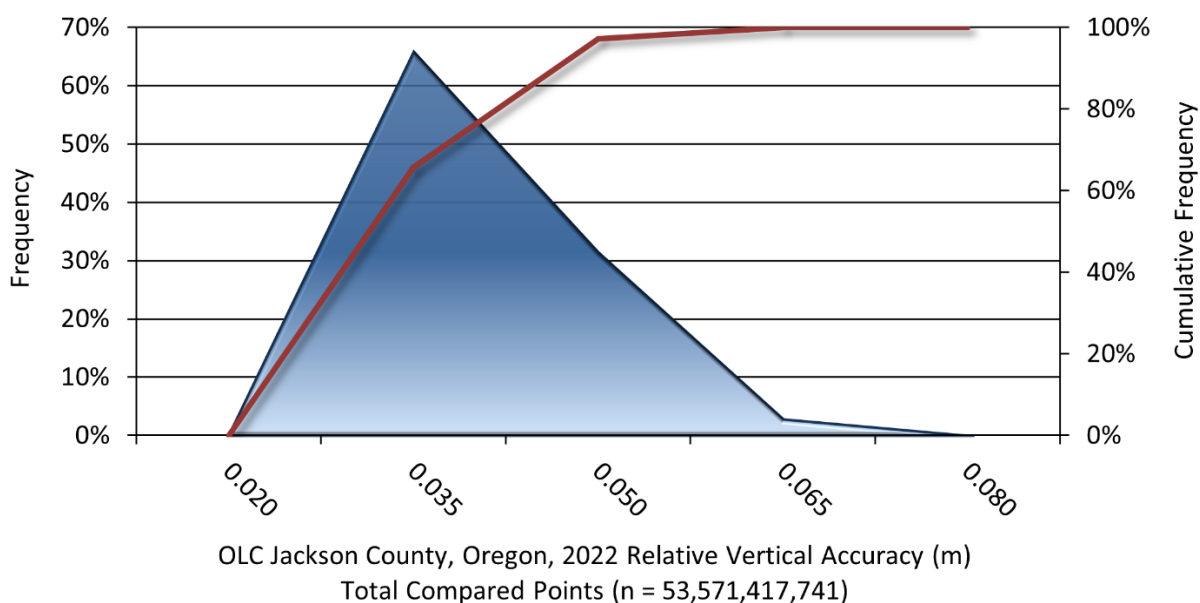


Figure 13: Frequency plot for relative vertical accuracy between flight lines

Lidar Horizontal Accuracy

Lidar horizontal accuracy is a function of Global Navigation Satellite System (GNSS) derived positional error, flying altitude, and INS derived attitude error. The obtained $RMSE_r$ value is multiplied by a conversion factor of 1.7308 to yield the horizontal component of the National Standards for Spatial Data Accuracy (NSSDA) reporting standard where a theoretical point will fall within the obtained radius 95 percent of the time. Based on a flying altitude of 2500 meters, an IMU error of 0.002 decimal degrees, and a GNSS positional error of 0.023 meters, this project was produced to meet 0.896 feet (0.273 meters) horizontal accuracy at the 95% confidence level (Table 17).

Table 17: Horizontal Accuracy

Parameter	Horizontal Accuracy
$RMSE_r$	0.518 ft
	0.158 m
ACC_r	0.896 ft
	0.273 m

CERTIFICATIONS

NV5 Geospatial provided lidar services for the OLC Jackson County project as described in this report.

I, Brian Von Seggern, have reviewed the attached report for completeness and hereby state that it is a complete and accurate report of this project.


Brian Von Seggern (Nov 20, 2023 16:40 PST)

Nov 20, 2023

Brian Von Seggern
Project Manager
NV5 Geospatial

I, Evon P. Silvia, PLS, being duly registered as a Professional Land Surveyor in and by the state of Oregon, hereby certify that the methodologies, static GNSS occupations used during airborne flights, and ground survey point collection were performed using commonly accepted Standard Practices. Field work conducted for this report was conducted on November 14-22, 2022, and on June 28-30, 2023 for the airborne survey, and between November 30 and December 30 2022, for the ground survey.

Accuracy statistics shown in the Accuracy Section of this Report have been reviewed by me and found to meet the "National Standard for Spatial Data Accuracy".


Nov 20, 2023

Evon P. Silvia, PLS
NV5 Geospatial
Corvallis, OR 97330

REGISTERED
PROFESSIONAL
LAND SURVEYOR



OREGON
JUNE 10, 2014
EVON P. SILVIA
81104LS

EXPIRES: 06/30/2024

SELECTED IMAGES

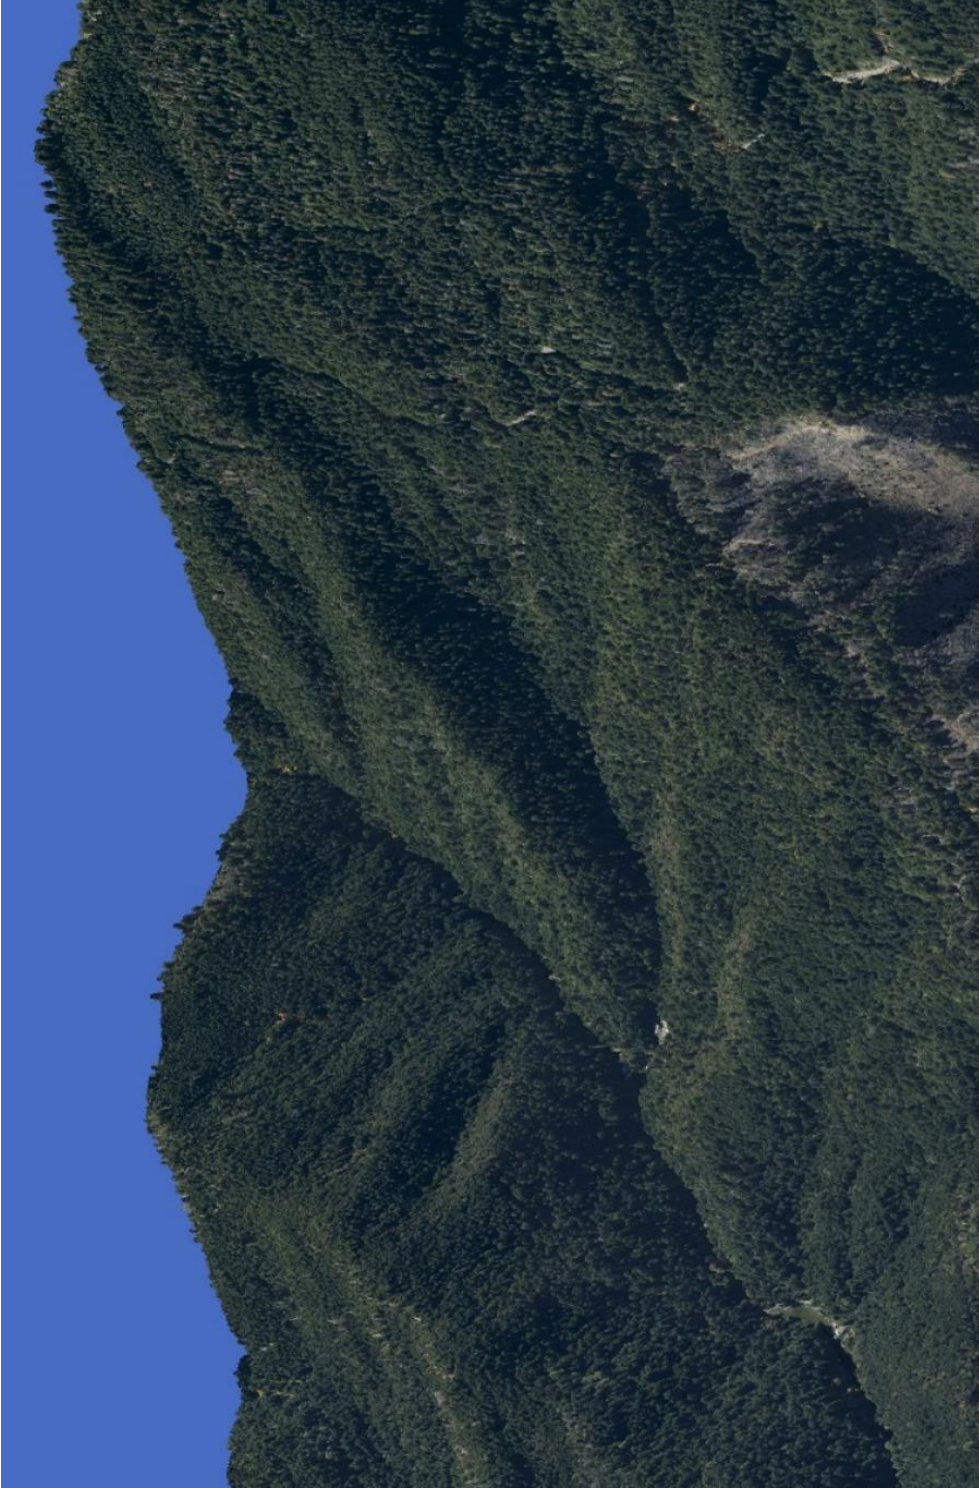


Figure 14: A view looking south in the Cascade Mountain Range just west of Ashland, Oregon. The image was created from the lidar bare earth model and above ground point cloud, colored by satellite imagery.

GLOSSARY

1-sigma (σ) Absolute Deviation: Value for which the data are within one standard deviation (approximately 68th percentile) of a normally distributed data set.

1.96 * RMSE Absolute Deviation: Value for which the data are within two standard deviations (approximately 95th percentile) of a normally distributed data set, based on the FGDC standards for Non-vegetated Vertical Accuracy (NVA) reporting.

Accuracy: The statistical comparison between known (surveyed) points and laser points. Typically measured as the standard deviation (sigma σ) and root mean square error (RMSE).

Absolute Accuracy: The vertical accuracy of lidar data is described as the mean and standard deviation (sigma σ) of divergence of lidar point coordinates from ground survey point coordinates. To provide a sense of the model predictive power of the dataset, the root mean square error (RMSE) for vertical accuracy is also provided. These statistics assume the error distributions for x, y and z are normally distributed, and thus we also consider the skew and kurtosis of distributions when evaluating error statistics.

Relative Accuracy: Relative accuracy refers to the internal consistency of the data set; i.e., the ability to place a laser point in the same location over multiple flight lines, GPS conditions and aircraft attitudes. Affected by system attitude offsets, scale and GPS/IMU drift, internal consistency is measured as the divergence between points from different flight lines within an overlapping area. Divergence is most apparent when flight lines are opposing. When the lidar system is well calibrated, the line-to-line divergence is low (<10 cm).

Root Mean Square Error (RMSE): A statistic used to approximate the difference between real-world points and the lidar points. It is calculated by squaring all the values, then taking the average of the squares and taking the square root of the average.

Data Density: A common measure of lidar resolution, measured as points per square meter.

Digital Elevation Model (DEM): File or database made from surveyed points, containing elevation points over a contiguous area. Digital terrain models (DTM) and digital surface models (DSM) are types of DEMs. DTMs consist solely of the bare earth surface (ground points), while DSMs include information about all surfaces, including vegetation and man-made structures.

Intensity Values: The peak power ratio of the laser return to the emitted laser, calculated as a function of surface reflectivity.

Nadir: A single point or locus of points on the surface of the earth directly below a sensor as it progresses along its flight line.

Overlap: The area shared between flight lines, typically measured in percent. 100% overlap is essential to ensure complete coverage and reduce laser shadows.

Pulse Rate (PR): The rate at which laser pulses are emitted from the sensor; typically measured in thousands of pulses per second (kHz).

Pulse Returns: For every laser pulse emitted, the number of wave forms (i.e., echoes) reflected back to the sensor. Portions of the wave form that return first are the highest element in multi-tiered surfaces such as vegetation. Portions of the wave form that return last are the lowest element in multi-tiered surfaces.

Real-Time Kinematic (RTK) Survey: A type of surveying conducted with a GPS base station deployed over a known monument with a radio connection to a GPS rover. Both the base station and rover receive differential GPS data and the baseline correction is solved between the two. This type of ground survey is accurate to 1.5 cm or less.

Post-Processed Kinematic (PPK) Survey: GPS surveying is conducted with a GPS rover collecting concurrently with a GPS base station set up over a known monument. Differential corrections and precisions for the GNSS baselines are computed and applied after the fact during processing. This type of ground survey is accurate to 1.5 cm or less.

Scan Angle: The angle from nadir to the edge of the scan, measured in degrees. Laser point accuracy typically decreases as scan angles increase.

Native Lidar Density: The number of pulses emitted by the lidar system, commonly expressed as pulses per square meter.

APPENDIX A - ACCURACY CONTROLS

Relative Accuracy Calibration Methodology:

Manual System Calibration: Calibration procedures for each mission require solving geometric relationships that relate measured swath-to-swath deviations to misalignments of system attitude parameters. Corrected scale, pitch, roll and heading offsets were calculated and applied to resolve misalignments. The raw divergence between lines was computed after the manual calibration was completed and reported for each survey area.

Automated Attitude Calibration: All data were tested and calibrated using TerraMatch automated sampling routines. Ground points were classified for each individual flight line and used for line-to-line testing. System misalignment offsets (pitch, roll and heading) and scale were solved for each individual mission and applied to respective mission datasets. The data from each mission were then blended when imported together to form the entire area of interest.

Automated Z Calibration: Ground points per line were used to calculate the vertical divergence between lines caused by vertical GPS drift. Automated Z calibration was the final step employed for relative accuracy calibration.

Lidar accuracy error sources and solutions:

Source	Type	Post Processing Solution
Long Base Lines	GPS	None
Poor Satellite Constellation	GPS	None
Poor Antenna Visibility	GPS	Reduce Visibility Mask
Poor System Calibration	System	Recalibrate IMU and sensor offsets/settings
Inaccurate System	System	None
Poor Laser Timing	Laser Noise	None
Poor Laser Reception	Laser Noise	None
Poor Laser Power	Laser Noise	None
Irregular Laser Shape	Laser Noise	None

Operational measures taken to improve relative accuracy:

Low Flight Altitude: Terrain following was employed to maintain a constant above ground level (AGL). Laser horizontal errors are a function of flight altitude above ground (about 1/3000th AGL flight altitude).

Focus Laser Power at narrow beam footprint: A laser return must be received by the system above a power threshold to accurately record a measurement. The strength of the laser return (i.e., intensity) is a function of laser emission power, laser footprint, flight altitude and the reflectivity of the target. While surface reflectivity cannot be controlled, laser power can be increased and low flight altitudes can be maintained.

Reduced Scan Angle: Edge-of-scan data can become inaccurate. The scan angle was reduced to a maximum of $\pm 24^\circ$ from nadir, creating a narrow swath width and greatly reducing laser shadows from trees and buildings.

Quality GPS: Flights took place during optimal GPS conditions (e.g., 6 or more satellites and PDOP [Position Dilution of Precision] less than 3.0). Before each flight, the PDOP was determined for the survey day.

Ground Survey: Ground survey point accuracy (<1.5 cm RMSE) occurs during optimal PDOP ranges and targets a minimal baseline distance of 4 miles between GPS rover and base. Robust statistics are, in part, a function of sample size (n) and distribution. Ground survey points are distributed to the extent possible throughout multiple flight lines and across the survey area.

50% Side-Lap (100% Overlap): Overlapping areas are optimized for relative accuracy testing. Laser shadowing is minimized to help increase target acquisition from multiple scan angles. Ideally, with a 50% side-lap, the nadir portion of one flight line coincides with the swath edge portion of overlapping flight lines. A minimum of 50% side-lap with terrain-followed acquisition prevents data gaps.

Opposing Flight Lines: All overlapping flight lines have opposing directions. Pitch, roll and heading errors are amplified by a factor of two relative to the adjacent flight line(s), making misalignments easier to detect and resolve.