



The Oregon Department of Geology and Mineral Industries (DOGAMI) has been identifying and mapping the tsunami inundation hazard along the Oregon coast since 1994. In Oregon, DOGAMI manages the National Tsunami Hazard Mitigation Program, which has been administered by the National Oceanic and Atmospheric Administration (NOAA) since 1995. DOGAMI's work is designed to help cities, counties, and other states in coastal areas reduce the potential for disastrous tsunami-related consequences by understanding and mitigating this geologic hazard. Using federal funding awarded by NOAA, DOGAMI has developed a new generation of tsunami inundation maps to help residents and visitors along the entire Oregon coast prepare for the next Cascadia Subduction Zone (CSZ) earthquake and tsunami, as well as for far-travelled, or 'distant' tsunamis.

The 'Ring of Fire' also called the Circum-Pacific Belt, is the zone of earthquake activity surrounding the Pacific Ocean. It is an arc stretching from New Zealand, along the eastern edge of Asia, north across the Aleutian Islands of Alaska, and south along the coast of North and South America (Figure 1). The Ring of Fire is located at the borders of the Pacific Plate and other major tectonic plates. The Pacific Plate is colliding with and sliding underneath other plates creating subduction zones that eventually release energy in the form of an earthquake rupture. This rupture causes a vertical displacement of water that creates a tsunami. When these events occur around the Ring of Fire but not directly off the Oregon coast, they take more time to travel the Pacific Ocean and arrive onshore in Oregon (Figure 2). Distant earthquake/tsunami events have affected the Oregon coast: for example, offshore Alaska in 1964 and offshore Japan in March 2011.

Historically about 28 distinct tsunamis have been documented by Oregon tide gauges since 1854. The most severe was generated by the 1964 M9.2 Prince William Sound earthquake in Alaska. Oregon was hit by the tsunami which killed four people and caused an estimated 750,000 to 1 million dollars in damage to bridges, houses, cars, boats, and sea walls. The greatest tsunami damage in Oregon did not occur along the ocean front as one might expect, but in the estuary channels located further inland. Of the communities affected, Seaside was inundated by a 10 foot tsunami wave and was the hardest hit. Tsunami wave heights reached 10 to 11.5 feet in the Nehalem River, 10 to 11.5 feet at Depoe Bay, 11.5 feet at Newport, 10 to 11 feet at Florence, 11 feet at Reedsport, 11 feet at Brookings, and 14 feet at Coos Bay (Witter and others, 2011).

**Alaska-Aleutian Model Specifications:** DOGAMI model two distant tsunamis and tsunami scenarios involving M9.2 earthquakes originating near the Gulf of Alaska. The first scenario attempts to replicate the 1964 Prince William Sound event, and the second scenario represents a hypothetical maximum event. This maximum event is the same model used by the U.S. Geological Survey (USGS) in their 2008 tsunami hazard assessment of Seaside (TPSW, 2008). This model uses extreme fault model parameters that result in maximum seafloor uplift nearly twice as large as in the 1964 earthquake. The selected source is the Aleutian trench of islands, which has the higher energy release directed toward Oregon coast than other Alaskan source locations. For these reasons the hypothetical "Alaska Maximum" scenario is selected as the worst case distant tsunami scenario for Oregon. Detailed information on fault geometries, subsidence, computer models, and the methodology used to create the tsunami scenarios presented on this map can be found in DOGAMI Special Paper 43 (Witter and others, 2011).

A world map showing the boundaries of the major tectonic plates. The plates are labeled: North America, South America, Eurasia, Africa, Australia, Antarctic, Pacific, Indian, and Atlantic. The map also shows the Mid-Atlantic Ridge, the Gulf Stream, and the equator. The Pacific Ocean is highlighted in red.

Figure 1: The movement of active earth plates that rings much of the world, including the Oceanic and continental plates, and earthquakes caused by the movement of these plates. One type of plate movement is subduction – where one plate, such as the oceanic plate, moves beneath another, thicker plate. Earthquakes throughout the world are caused by subduction and other plate movements.

Figure 2: This actual initial tsunami hours, around the 1964 Prince of Wales earthquake. The earthquake and caused 125 deaths in property loss, deaths in Alaska tsunami devastated along the Gulf of Alaska damage in British Columbia and along the west coast of the United States, and was gauges in Cuba and

	Entire Map Area	Dunes City	Unincorporated Areas
<b>Total Buildings</b>	315	165	150
<b>Buildings within Tsunami Zones*</b>			
Alaska M9.2 (1964)		0	0
Alaska Maximum		1	1
<b>Percent of Buildings within Tsunami Zones</b>			
Alaska M9.2 (1964)		0.0%	0.0%
Alaska Maximum		0.3%	0.7%

\*Building counts shown are based on polygon centroids and are cumulative within the map area.

The graph displays the change in water level (in meters) over time (in hours) for two tsunami scenarios at station C49. The y-axis ranges from -40.0 to 70.0 meters, and the x-axis ranges from 0.0 to 8.0 hours. A legend indicates two scenarios: Alaska M9.2 (1964) in orange and Alaska Maximum in blue. The Alaska M9.2 (1964) scenario shows a significant peak of approximately 20 meters around 4.0 hours, followed by several smaller oscillations. The Alaska Maximum scenario remains at 0.0 meters throughout the 8-hour period.

Time since Earthquake (hours)	Alaska M9.2 (1964) (m)	Alaska Maximum (m)
0.0	0.0	0.0
1.0	0.0	0.0
2.0	0.0	0.0
3.0	0.0	0.0
4.0	20.0	0.0
5.0	10.0	0.0
6.0	15.0	0.0
7.0	10.0	0.0
8.0	10.0	0.0

Figure 4: This chart depicts the tsunami waves as they arrive at the selected reference point (simulated gauge station). It shows the change in wave heights for the two Alaska tsunami scenarios over an 8-hour period. Wave heights vary through time, and the first wave will not necessarily be the largest as waves interfere and reflect off local topography and bathymetry. Any absence of data indicates periods for which tsunami inundation has not yet reached or has receded from the station location and dry land is exposed.

## 2013

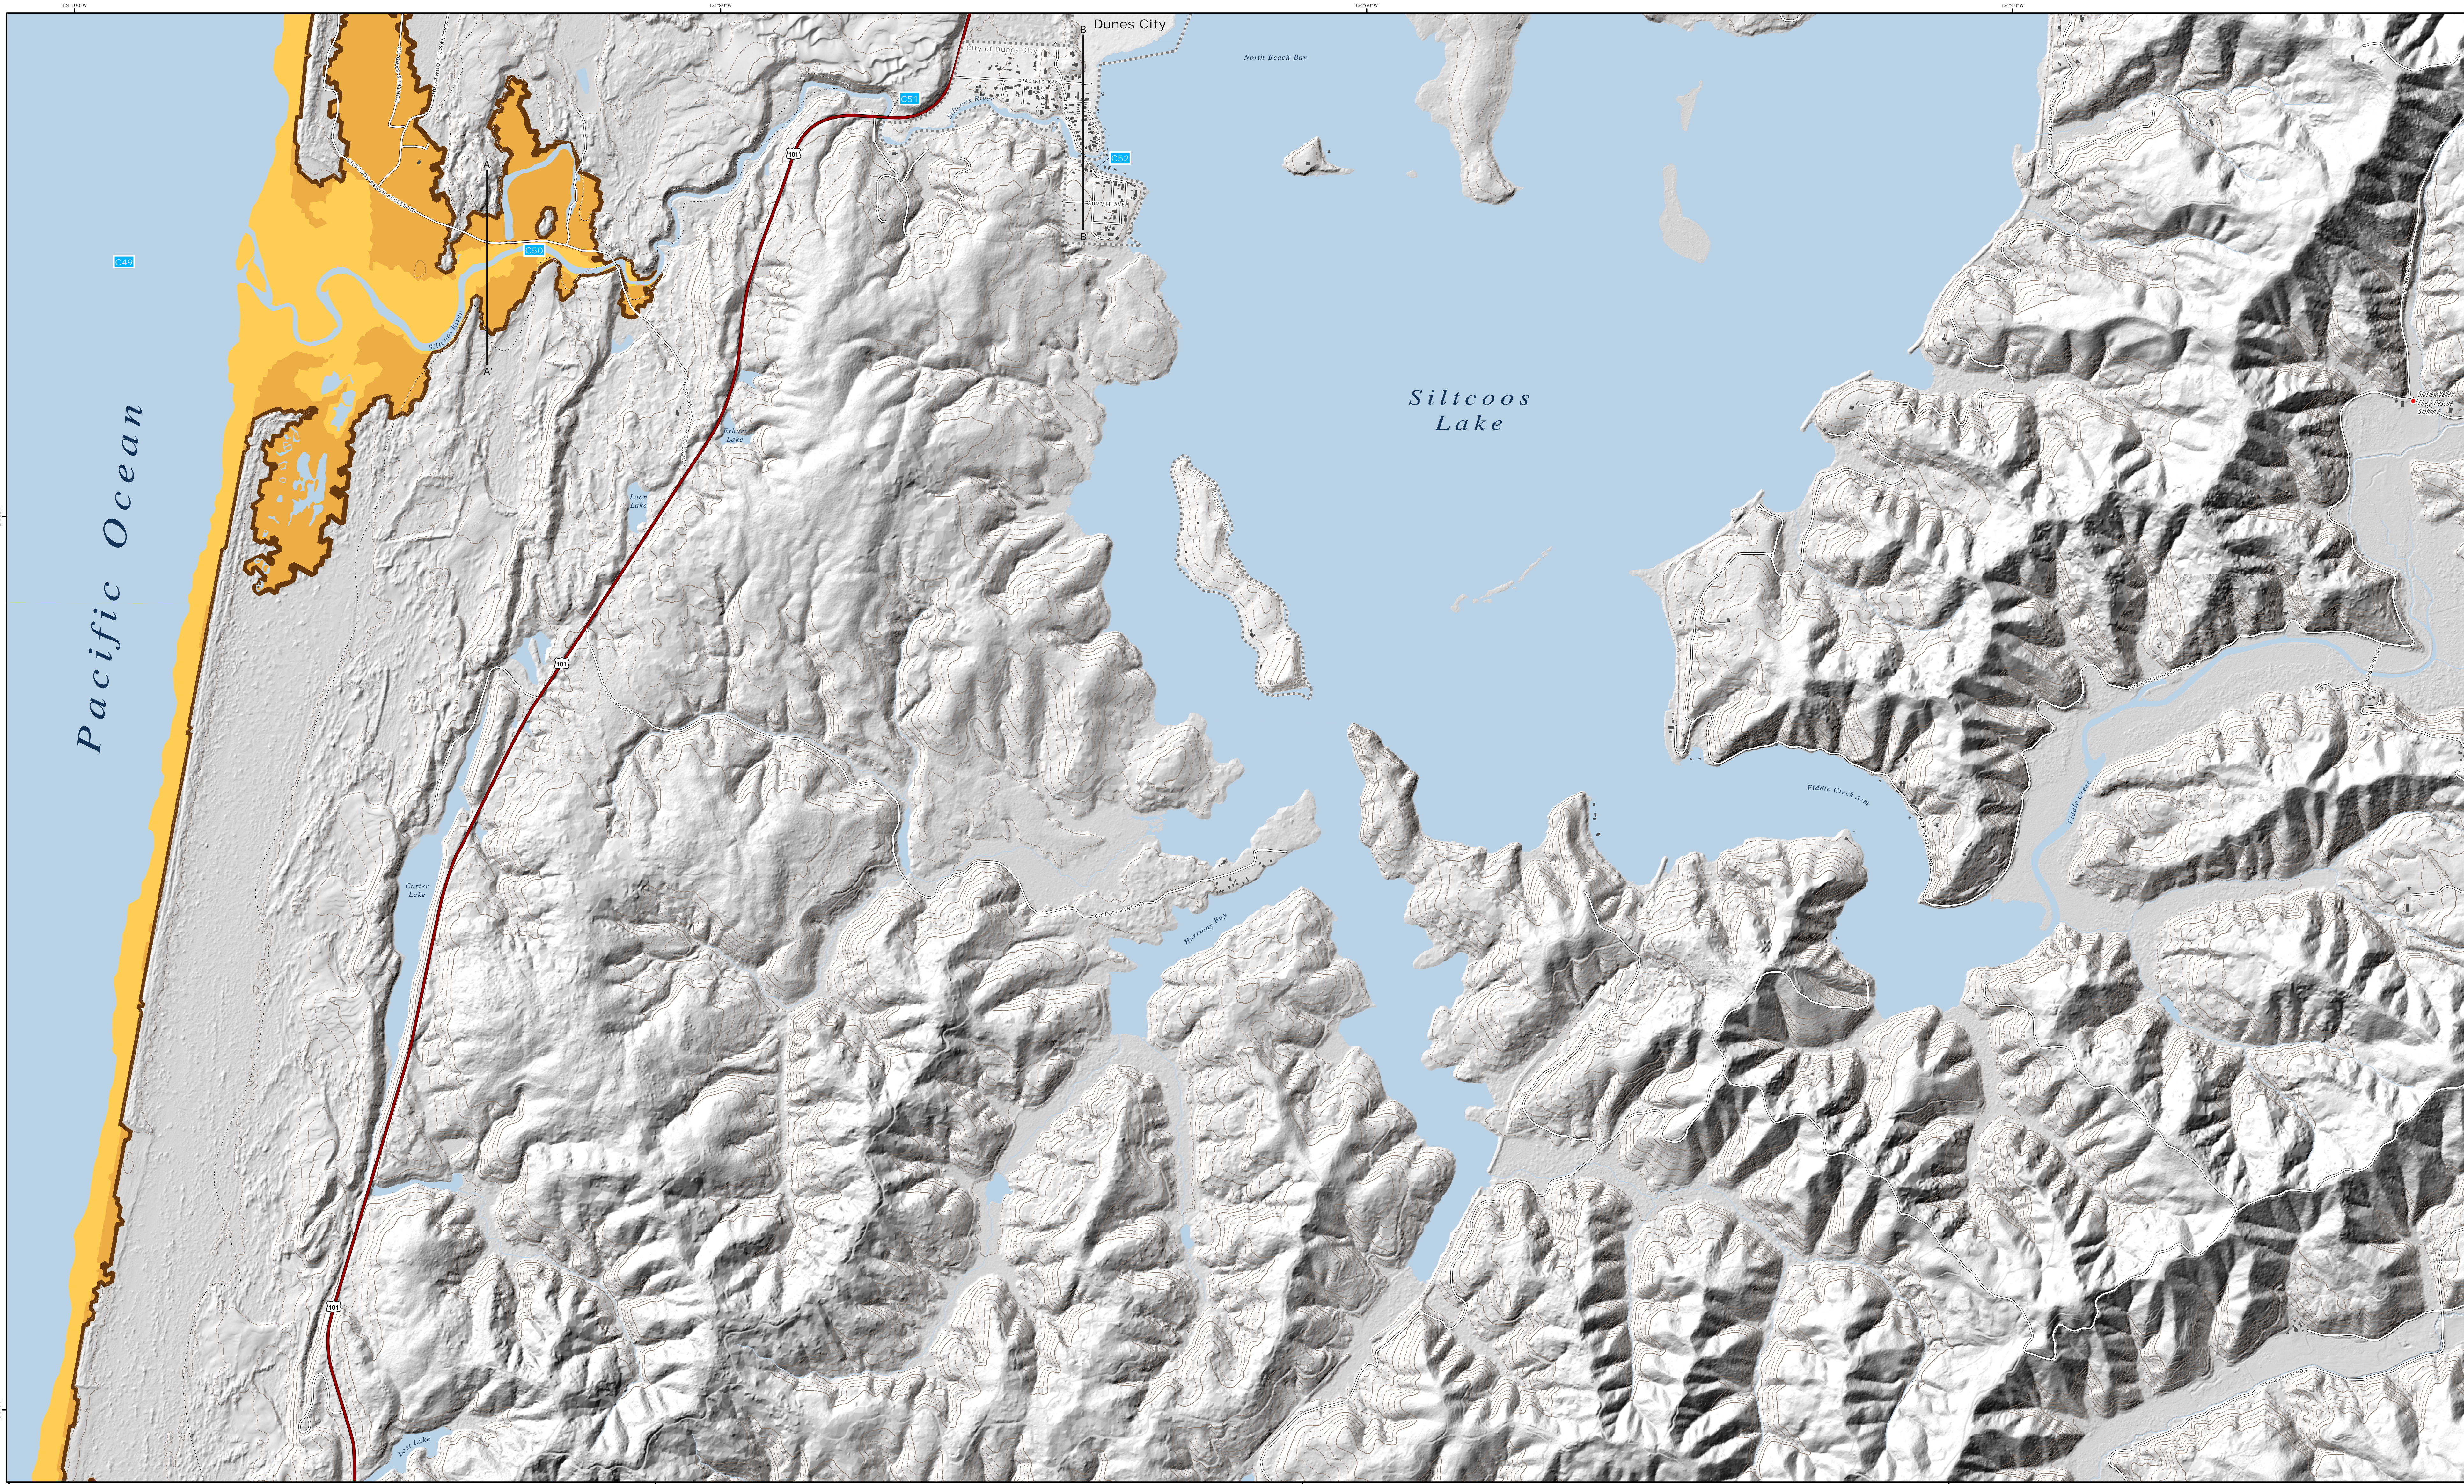


Figure 5: These profiles depict the expected maximum tsunami wave elevation for the two Alaska tsunami scenarios along lines A-A' and B-B'. The tsunami scenarios are modeled to occur at a static (no flow) tide and equal to the Mean Higher High Water (MHHW) high tide.

Earthquake Size	Slip / Deformation	Earthquake Magnitude	
	Alaska M9.2 (1964)	Vertical seafloor deformation estimate.	-9.2
	Alaska Maximum	Uniform slip on 12 subfaults with each assigned values ranging from 40 to 88 feet.	-9.2
	Alaska Maximum Wet/Dry Zone		
	Urban Growth Boundary		Fire Station
	Building Footprint		Police Station
	Simulated Gauge Station		School
	Profile Location		Hospital/Urgent Care Clinic
	Senate Bill 379 Line		U.S. Highway
	State Park		State Highway
	Elevation Contour (25 ft intervals up to 200 ft)		Improved Road

Map of the Willamette Valley showing the locations of the eight study sites. The sites are numbered 01 through 08. Site 06 is highlighted with a thick black border. The map includes major roads like Lincoln Lane, Benton Lane, Lane, and Douglas. An inset map shows the location of the study area within the state of Oregon.

Line-01	Heptuple	Line-05	Cuthman - Wendson
Line-02	Heceta Head	Line-06	Tierman - Mapleton
Line-03	Merret Lake	Line-07	Dunes City
Line-04	Florence	Line-08	Sillcoos Lake

[illegible]